

# Coin and Token Shower Timers for One to Three Showers SLZA 01LN, SLZA 01LNZ



SLZA 01LN




SLZA 01LNZ

## Characteristics





- **hygienic flush**
- **vandal-proof**
- **choice of shower by the user**
  - before inserting a coin or token the user chooses the requested shower by the push button, the number of shower is shown on the display
- **interactive control**
  - the user can start or stop the water directly in the shower
- **30 s before the end of water supply the user is warned by interrupting of water flow**
- **index Z - recessed**
- **parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time value, current euro exchange, token value, display contrast, possibility switch off some from showers)**
- **marking of the buttons by symbols could be made to order**
- **the possibility of obtaining the statistical information, device diagnostics**
- **lockable**
- **material AISI - 304**
- **could be made to order from stainless steel AISI - 316L**
- **brushed finish**

## Installation Drawing

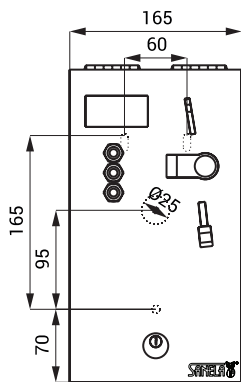

SLZA 01LN

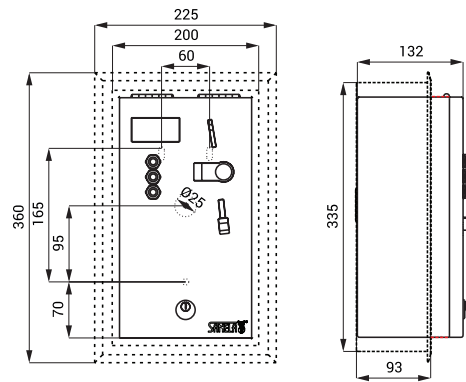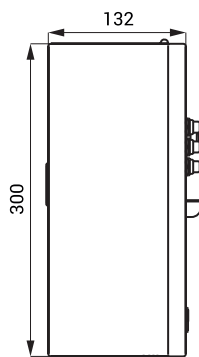

SLZA 01LNZ

## Technical Specification

**Dimension of hole in the wall for models with index Z**

**Operating voltage**

**Power input**

**Types of coins**

**Delay time for paid 5 CZK**

335 x 200 x 125 mm

24 V DC

26 W

(depends on the accessories and the number of showers)

5, 10, 20 and 50 CZK,

1 and 2 EUR, metal token

0 - 255 s, standard 30 s

## Supply Specification

- SLZA 01LN - Supply No. 88017** stainless steel coin machine with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 01LNZ - Supply No. 88018** stainless steel coin machine with electronics, coin holder and coin box, set of keys (2 pcs.) mounting frame

## Necessary Accessories



**SLZA 20P**

**88207**

Shower control with piezo button  
- pre-mixed water



**SLZA 20PH**

**88208**

Shower control with piezo button  
- for cold and hot water, temperature regulated  
by mixer



**SLZA 20PT**

**88209**

Shower control with piezo button  
- for cold and hot water, temperature regulated  
by thermostatic mixer



**SLZA 21P**

**88217**

Stainless steel shower panel with piezo  
button - pre-mixed water



**SLZA 21PH**

**88218**

Stainless steel shower panel with piezo  
button - for cold and hot water, temperature  
regulated by mixer



**SLZA 21PT**

**88219**

Stainless steel shower panel with piezo  
button - for cold and hot water, temperature  
regulated by thermostatic mixer

## Recommended Accessories

SLZA 50	-	Supply No. 88500	set of 50 pcs. of tokens for coin machine
SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X	-	Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLD 05	-	Supply No. 07050	remote control for an adjustment of parameters
SLA 03	-	Supply No. 06030	vandal-proof shower head
SLA 39	-	Supply No. 06390	vandal-proof shower head
SLA 40	-	Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow