

Stainless Steel Automatic Drinking Fountain SLUN 14E



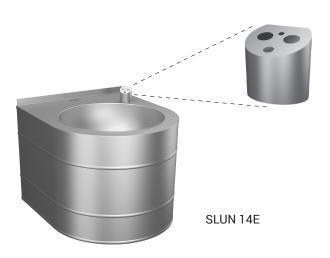

Dimensions

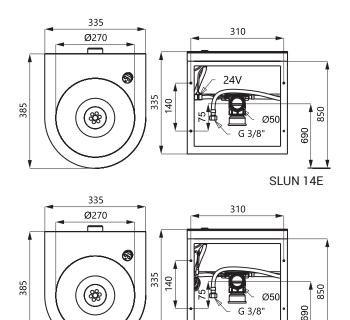

Characteristics

hygienic flush

- stainless steel wall hung drinking fountain with automatic infra-red drinking spout
- system reacts to the user's face in front of the sensor
- water stops after user leaving the active range of the sensor
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03
- water flow regulation on drinking spout
- material AISI 304
- polished finish

Technical Specification

Operating voltage	
SLUN 14E	24 V DC
 SLUN 14EB 	6 V DC
Power input	
operating by 24 V DC	7 W
operating by 6 V	3 W
Battery life	
 4 pcs. AA alkaline batteries AA, 1,5 V, 2700 mAh 	approx. 2 years (100 uses per day)
Active range	0,23 - 0,31 m
Recommended flow pressure Rate of flow Water inlet	0,1 - 0,6 MPa 1,4 l/min. (inf. data) male thread G 1/2"

Supply Specification

SLUN 14E - Supply No. 93141 SLUN 14EB - Supply No. 93142 stainless steel drinking fountain, drinking spout with electronics, electromagnetic valve (1 pc.), angle valve with filter (1 pc.), connecting hoses, siphon, mounting set, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLUN 14EB)

Recommended Accessories

SLZ 01Y - Supply No. 05012 SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 5 pcs. of spouts power supply 24 V DC for operating of max. 9 pcs. of spouts
SLZ 04Y - Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of spouts
SLZ 04Z - Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of spouts
SLZ 04X - Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of spouts
SLD 03 - Supply No. 07030	remote control for an adjustment of parameters
SLA 36 - Supply No. 06360	set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)

SLUN 14EB