


Automatic Washbasin Taps SLU 08LN, SLU 08LND



SANELA 
we make water cool®



SLU 08LND


SLU 08LN

Characteristics



- includes Bluetooth control (paid Sanela Control app available for download)
- economical aerator, rate of flow 6 l/min
- hygienic flush
- suitable for medical facilities
- swivel faucet
- index „D“ - higher faucet
- are destined for cold and hot water, temperature is regulated by mixer
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 – 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or the SLD 03

Dimensions

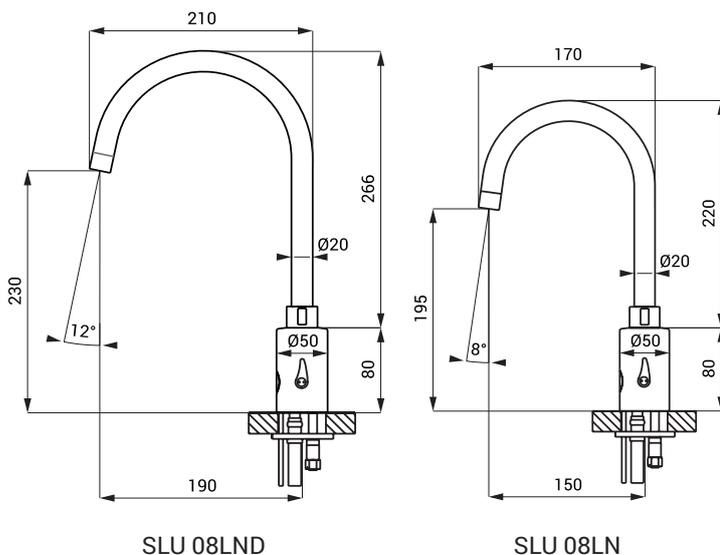

SLU 08LND

SLU 08LN

Technical Specification

Operating voltage

- SLU 08LN, 08LND 24 V DC
- SLU 08LNB, 08LNDB 6V

Power input

- operating by 24 V DC 14 W
- operating by 6 V 6 W

Battery life

- 4 pcs. AA alkaline batteries approx. 2 years (100 uses per day)
- AA, 1,5 V, 2700 mAh

Active range

- standard 0,2 - 0,26 m
- START/STOP program 0,05 - 0,15 m

Recommended flow pressure

- 0,1 - 0,6 MPa

Rate of flow

- 13 l/min. or 6 l/min. (inf. data)

Water inlet

- male thread G 1/2"

Supply Specification

- SLU 08LN - Supply No. 13181 faucet with mixer and electronics and solenoid valve, coupling hoses,
- SLU 08LNB - Supply No. 13086 angle valve with filter and check valve (2 pcs.), aerator 6 l/min, 4 pcs. AA alkaline
- SLU 08LND - Supply No. 13183 batteries 1,5 V, 2700 mAh with battery case (for models with index B)
- SLU 08LNDB - Supply No. 13088

Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 2 pcs. of washbasin taps
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 4 pcs. of washbasin taps
- SLZ 04Y - Supply No. 05042 power supply 24 V DC for DIN rail, for operating of max. 2 pcs. of washbasin taps
- SLZ 04Z - Supply No. 05041 power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of washbasin taps
- SLZ 04X - Supply No. 10049 power supply 24 V DC for DIN rail, for operating of max. 7 pcs. of washbasin taps
- SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of washbasin tap
- SLD 03 - Supply No. 07030 remote control for an adjustment of parameters
- SLA 36 - Supply No. 06360 set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)
- SANELA CONTROL APP - paid Sanela Control app available for download on the App Store and Google Play