


# Stainless Steel Automatic Washing Troughs SLUN 50E, SLUN 51E, SLUN 52E, SLUN 53E




SLUN 50E

## Characteristics

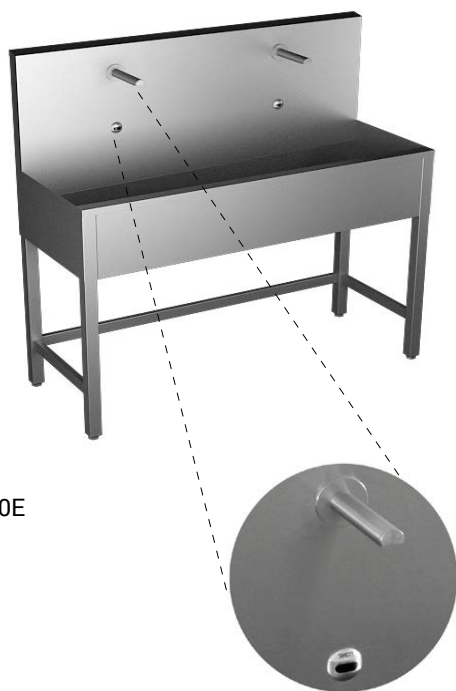

- economical aerator, rate of flow 6l/min
- hygienic flush
- vandal-proof
- suitable for medical facilities
- stainless steel floor standing washing troughs with integrated electronics
- vandal-proof stainless steel spouts and sensing heads
- SLUN 50E, ET - length 1250 mm (2 pcs. of electronics)
- SLUN 51E, ET - length 1900 mm (3 pcs. of electronics)
- SLUN 52E, ET - length 2500 mm (4 pcs. of electronics)
- SLUN 53E, ET - length 3000 mm (5 pcs. of electronics)
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 - 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03
- temperature is regulated by angle valves (for models with index E) or by thermostatic valve (for models with index ET)
- different lenghts could be made to order
- material AISI - 304
- could be made to order from stainless steel AISI - 316L
- brushed finish

## Dimensions

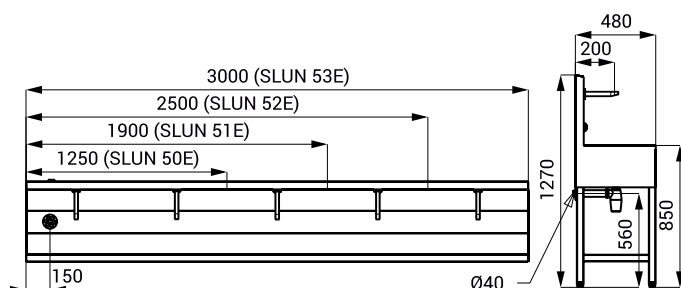

## Technical Specification

<b>Operating voltage</b>	24 V DC
<b>Power input</b>	
▪ SLUN 50E, ET	14 W
▪ SLUN 51E, ET	20 W
▪ SLUN 52E, ET	27 W
▪ SLUN 53E, ET	33 W
<b>Active range</b>	0,23 - 0,31 m
<b>Recommended flow pressure</b>	0,1 - 0,6 MPa
<b>Rate of flow</b>	6 l/min. (inf. data)
<b>Water inlet</b>	male thread G 1/2"

## Supply Specification

- SLUN 50E - Supply No. 93501
- SLUN 51E - Supply No. 93511
- SLUN 52E - Supply No. 93521
- SLUN 53E - Supply No. 93531
- SLUN 50ET - Supply No. 93503
- SLUN 51ET - Supply No. 93513
- SLUN 52ET - Supply No. 93523
- SLUN 53ET - Supply No. 93533

stainless steel washing trough with electronics and spouts, electromagnetic valve (pcs. according to number of electronics), connecting hoses, angle valve with filter and check valve (2 pcs.), siphon, thermostatic valve (for models with index ET)

## Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 4 pcs. of spouts
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 8 pcs. of spouts
- SLZ 04Y - Supply No. 05042 power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of spouts
- SLZ 04Z - Supply No. 05041 power supply 24 V DC for DIN rail, for operating of max. 8 pcs. of spouts
- SLZ 04X - Supply No. 10049 power supply 24 V DC for DIN rail, for operating of max. 14 pcs. of spouts
- SLD 03 - Supply No. 07030 remote control for an adjustment of parameters
- SLA 56A - Supply No. 06560 economical aerator 3,8 l/min
- SLA 56B - Supply No. 06561 economical aerator 1,9 l/min