

Automatic Thermostatic Shower Control SLS 03





SLS 03

Characteristics



- **hygienic flush**
- is destined for cold and hot water, temperature is regulated by thermostatic mixer
- with upper outlet
- safety fuse against scalding
- water is flowing as long as an user is in the active range
- water stops flowing after the user leaves the active range sensor after adjustable time delay (can be set in range 0,25 - 7,75 s), standard 3 s
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

Installation Drawing

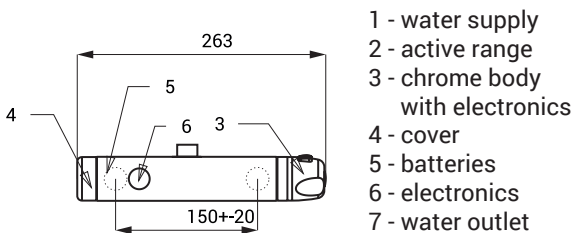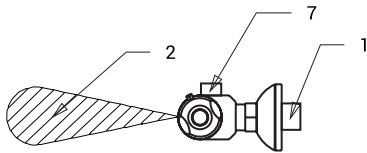

- 1 - water supply
- 2 - active range
- 3 - chrome body with electronics
- 4 - cover
- 5 - batteries
- 6 - electronics
- 7 - water outlet

Technical Specification

Water inlet spacing	150 mm
Operating voltage	
▪ SLS 03	24 V DC
▪ SLS 03B	9 V
Power input	
▪ operating by 24 V DC	3 W
▪ operating by 9 V	2 W
Battery life	
▪ lithium 9 V, type U9VL	approx. 2 years (100 uses per day)
Active range	
▪ standard	0,6 - 0,75 m
▪ START/STOP program	0,05 - 0,15 m
Recommended flow pressure	0,1 - 0,6 MPa
Water inlet	male thread G 1/2"
Water outlet	male thread G 1/2"

Supply Specification

SLS 03	- Supply No. 02030	shower control with electronics, thermostat and electromagnetic valve, rosette (2 pcs.),
SLS 03B	- Supply No. 02036	chrome cover (2 pcs.), filter (2 pcs.), Alley key, lithium battery SLA 09 (SLS 03B)

Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 10 pcs. of showers
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 20 pcs. of showers
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 10 pcs. of showers
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 20 pcs. of showers
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 33 pcs. of showers
SLD 03	- Supply No. 07030	remote control for an adjustment of parameters
SLA 09	- Supply No. 06090	lithium battery 9 V/1200 mAh, type U9VL (for models with index B)