


Stainless Steel Automatic Washing Troughs SLUN 80E, SLUN 81E, SLUN 82E, SLUN 83E




Characteristics

- economical aerator, rate of flow 6 l/min
- hygienic flush
- suitable for medical facilities
- stainless steel wall hung washing troughs with integrated electronics
- vandal-proof stainless steel spouts and sensing heads
- SLUN 80E, ET - length 1250 mm (2 pcs. of electronics)
- SLUN 81E, ET - length 1900 mm (3 pcs. of electronics)
- SLUN 82E, ET - length 2500 mm (4 pcs. of electronics)
- SLUN 83E, ET - length 3000 mm (5 pcs. of electronics)
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 - 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03
- temperature is regulated by angle valves (for models with index E) or by thermostatic valve (for models with index ET)
- different lengths could be made to order
- material AISI - 304
- could be made to order from stainless steel AISI - 316L
- brushed finish

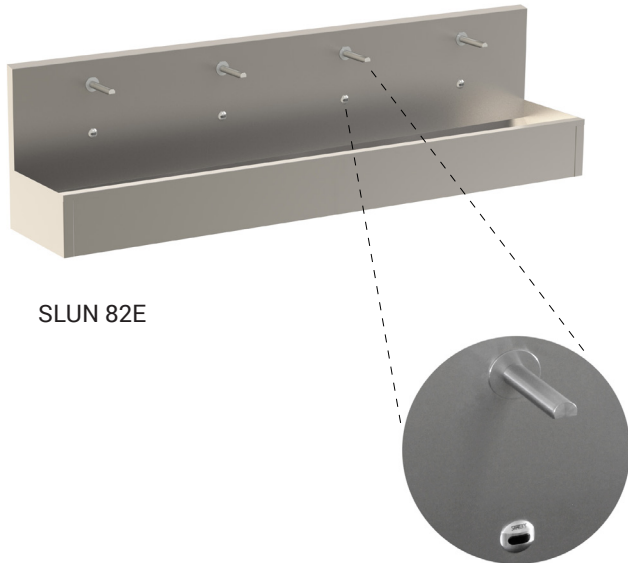

SLUN 82E

Dimensions

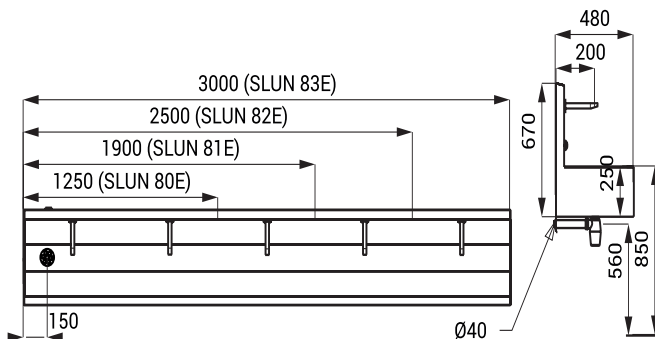

Technical Specification

Operating voltage	24 V DC
Power input	
▪ SLUN 80E	14 W
▪ SLUN 81E	20 W
▪ SLUN 82E	27 W
▪ SLUN 83E	33 W
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	6 l/min. (inf. data)
Water inlet	male thread G 1/2"

Supply Specification

SLUN 80E - Supply No. 93801	stainless steel washing trough with electronics and spouts, electromagnetic valve
SLUN 81E - Supply No. 93811	(pcs. according to number of electronics), connecting hoses, angle valve with
SLUN 82E - Supply No. 93821	check valve (2 pcs.), siphon, mounting set, thermostatic valve (for models
SLUN 83E - Supply No. 93831	with index ET)
SLUN 80ET - Supply No. 93803	
SLUN 81ET - Supply No. 93813	
SLUN 82ET - Supply No. 93823	
SLUN 83ET - Supply No. 93833	

Recommended Accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for operating of max. 4 pcs. of spouts
SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 8 pcs. of spouts
SLZ 04Y - Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of spouts
SLZ 04Z - Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 8 pcs. of spouts
SLZ 04X - Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 14 pcs. of spouts
SLD 03 - Supply No. 07030	remote control for an adjustment of parameters
SLZN 81 - Supply No. 85810	supportive stainless steel bracket for longer or atypical troughs
SLZN 81L - Supply No. 85811	supportive stainless steel bracket for longer or atypical troughs
SLA 56A - Supply No. 06560	economical aerator 3,8 l/min
SLA 56B - Supply No. 06561	economical aerator 1,9 l/min