

# Automatic Washbasin Taps gold COLOR ELITE LINE - SLU 57G, SLU 57GX



**SANELA**   
we make water cool®



gold  
SLU 57G


gold matt  
SLU 57GX

## Characteristics



- includes Bluetooth control (paid Sanela Control app available for download)
- economical aerator, rate of flow 6 l/min
- hygienic flush
- durable PVD surface finish
- is destined for cold and hot water, temperature is regulated by angle valves
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 – 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or SLD 03

## Dimensions

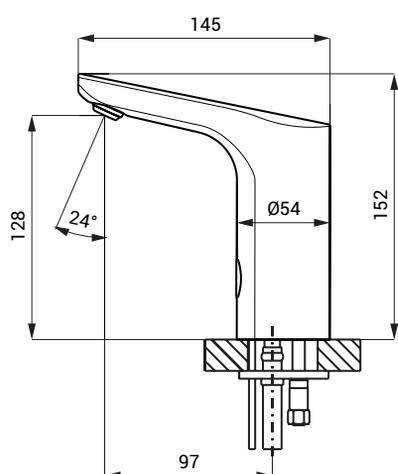

## Technical Specification

<b>Dimensions</b>	152 x 145 mm
<b>Weight</b>	
▪ SLU 57G, SLU 57GX	1,74 kg
▪ SLU 57GB, SLU 57GXB	1,86 kg
<b>Operating voltage</b>	
▪ SLU 57G, SLU 57GX	24 V DC
▪ SLU 57GB, SLU 57GXB	6 V
<b>Power input</b>	
▪ operating by 24 V DC	7 W
▪ operating by 6 V	3 W
<b>Battery life</b>	
▪ 4 ks AA alkaline batteries 1,5 V, 2700 mAh	approx. 2 years (100 uses per day)
<b>Active range</b>	
▪ standard	0,13 - 0,19 m
▪ START/STOP program	0,05 - 0,15 m
<b>Recommended flow pressure</b>	0,1 - 0,6 MPa
<b>Rate of flow</b>	6 l/min. (inf. data)
<b>Water inlet</b>	male thread G 1/2"

## Supply Specification

SLU 57G - Supply No. 13572 faucet with an electronics, electromagnetic valve (1 pc.), Y-piece, connecting hoses,  
SLU 57GX - Supply No. 13573 angle valve with filter and check valve (2 pcs.)

SLU 57GB - Supply No. 13578 faucet with an electronics, electromagnetic valve (1 pc.), Y-piece, connecting hoses,  
SLU 57GXB - Supply No. 13579 angle valve with filter and check valve (2 pcs.), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case

## Recommended Accessories

<b>SLZ 01Y</b>	-	<b>Supply No. 05012</b>	power supply 24 V DC for operating of max. 5 pcs. of washbasin taps
<b>SLZ 01Z</b>	-	<b>Supply No. 05011</b>	power supply 24 V DC for operating of max. 9 pcs. of washbasin taps
<b>SLZ 04Y</b>	-	<b>Supply No. 05042</b>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of washbasin taps
<b>SLZ 04Z</b>	-	<b>Supply No. 05041</b>	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of washbasin taps
<b>SLZ 04X</b>	-	<b>Supply No. 10049</b>	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of washbasin taps
<b>SLZ 06</b>	-	<b>Supply No. 05060</b>	power supply 24 V DC for operating of max. 1 pc. of washbasin tap
<b>SLD 03</b>	-	<b>Supply No. 07030</b>	remote control for an adjustment of parameters
<b>SLT 05</b>	-	<b>Supply No. 09050</b>	thermostatic valve 1/2", rate of flow 42 l/min by the pressure 0,1 MPa
<b>SLA 36</b>	-	<b>Supply No. 06360</b>	set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)
<b>SLA 55A</b>	-	<b>Supply No. 06550</b>	economical aerator 3,8 l/min
<b>SLA 55B</b>	-	<b>Supply No. 06551</b>	economical aerator 1,9 l/min
<b>APLIKACE SANELA CONTROL</b>			paid Sanela Control App available for download on the App Store and Google Play