

Stainless Steel Urinals with Hidden Flushing Unit SLPN 09C




SLPN 09C

Characteristics



- **vandal-proof**
- **suitable for a prison**
- stainless steel wall hung urinal with integrated electronics
- rear assembling through the service hatch and screws
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04
- automatic hygiene flushing after 6 hours non-use
- monitoring of battery capacity (for models with index B)
- material stainless steel AISI 304 (1.4301)
- brushed finish

Dimensions

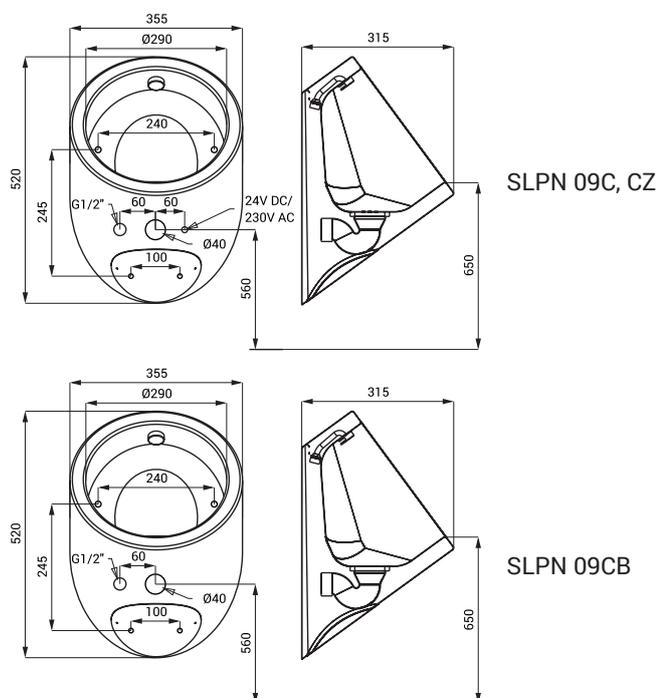

* for the height of the front edge of the urinal 650 mm above the floor

Supply Specification

SLPN 09C - Supply No. 91093	stainless steel urinal with flushing head, electronics, solenoid valve (1 pc.),
SLPN 09CZ - Supply No. 91095	angle valve with a filter, coupling hoses, mounting set, siphon, 4 pc. AA alkaline
SLPN 09CB - Supply No. 91094	batteries 1,5 V, 2700 mAh (SLPN 09CB), power supply (SLPN 09CZ)

Recommended Accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y - Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z - Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X - Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06 - Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 04 - Supply No. 07040	remote control for an adjustment of parameters
SLR 10 - Supply No. 08100	mounting frame for stainless steel urinals with built-in flush or stainless steel washbasins
SLA 36 - Supply No. 06360	set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)

Technical Specification

Dimensions	
▪ SLPN 09C	520 x 355 x 315 mm
▪ SLPN 09CZ	520 x 355 x 315 mm
▪ SLPN 09CB	520 x 355 x 315 mm
Weight	
▪ SLPN 09C	7,04 kg
▪ SLPN 09CZ	7,2 kg
▪ SLPN 09CB	7,2 kg
Operating voltage	
▪ SLPN 09C	24 V DC
▪ SLPN 09CZ	230 V AC/ 50 Hz
▪ SLPN 09CB	6 V
Power input	
▪ operating by 24 V DC	7 W
▪ operating by 6 V	3 W
Battery life	
▪ 4 pcs. AA alkaline batteries	approx. 2 years
AA, 1,5 V, 2700 mAh	(100 uses per day)
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min. (inf. data)
Water inlet	male thread G 1/2"