

# Stainless Steel Urinal with Hidden Flushing Unit SLPN 07C




SLPN 07C

## Characteristics




- vandal-proof
- suitable for a prison
- stainless steel wall hung urinal with integrated electronics
- rear assembling through the service hatch and screws
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04
- automatic hygiene flushing after 6 hours non-use
- monitoring of battery capacity (for models with index B)
- material stainless steel AISI 304 (1.4301)
- brushed finish

## Dimensions

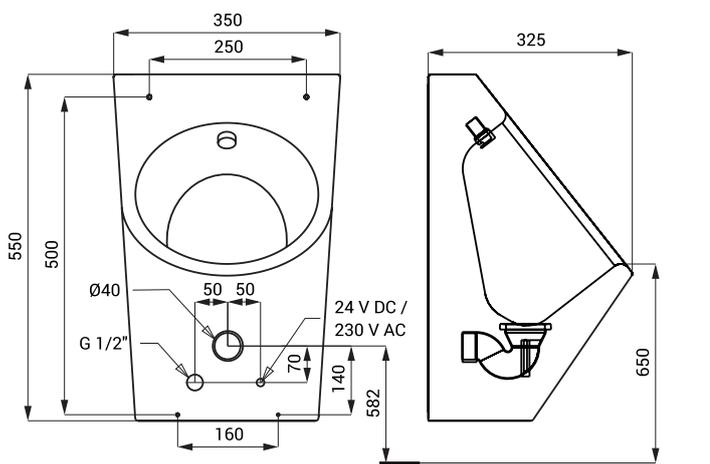

SLPN 07C, SLPN 07CZ

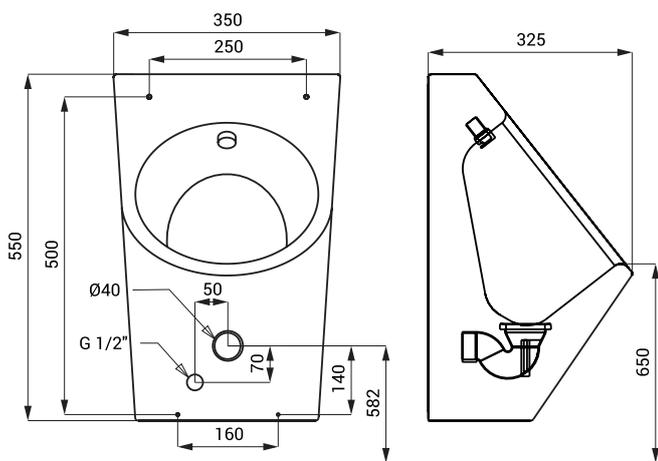

SLPN 07CB

\* for the height of the front edge of the urinal 650 mm above the floor

## Technical Specification

### Dimensions

- SLPN 07C 550 x 350 x 325 mm
- SLPN 07CZ 550 x 350 x 325 mm
- SLPN 07CB 550 x 350 x 325 mm

### Weight

- SLPN 07C 8 kg
- SLPN 07CZ 8 kg
- SLPN 07CB 8 kg

### Operating voltage

- SLPN 07C 24 V DC
- SLPN 07CZ 230 V AC/ 50 Hz
- SLPN 07CB 6 V

### Power input

- operating by 24 V DC 7 W
- operating by 6 V 3 W

### Battery life

- 4 pcs. AA alkaline batteries approx. 2 years (100 uses per day)

### Recommended flow pressure

0,1 - 0,6 MPa

### Rate of flow

12 l/min. (inf. data)

### Water inlet

male thread G 1/2"

## Supply Specification

SLPN 07C - Supply No. 91073  
SLPN 07CZ - Supply No. 91075  
SLPN 07CB - Supply No. 91074

stainless steel urinal with flushing head, electronics, solenoid valve (1 pc.), angle valve with a filter, coupling hoses, mounting set, siphon, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLPN 07CB), power supply (SLPN 07CZ)

## Recommended Accessories

<b>SLZ 01Y</b>	-	<b>Supply No. 05012</b>	power supply 24 V DC for operating of max. 5 pcs. of flushing units
<b>SLZ 01Z</b>	-	<b>Supply No. 05011</b>	power supply 24 V DC for operating of max. 9 pcs. of flushing units
<b>SLZ 04Y</b>	-	<b>Supply No. 05042</b>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of flushing units
<b>SLZ 04Z</b>	-	<b>Supply No. 05041</b>	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of flushing units
<b>SLZ 04X</b>	-	<b>Supply No. 10049</b>	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of flushing units
<b>SLZ 06</b>	-	<b>Supply No. 05060</b>	power supply 24 V DC for operating of max. 1 pc. of flushing unit
<b>SLD 04</b>	-	<b>Supply No. 07040</b>	remote control for an adjustment of parameters
<b>SLR 10</b>	-	<b>Supply No. 08100</b>	mounting frame for stainless steel urinals with built-in flush or stainless steel washbasins
<b>SLA 36</b>	-	<b>Supply No. 06360</b>	set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)