

# Automatic Toilet Flushing Unit for Jika Mounting Frame SLW 05A




SLW 05A

## Characteristics

- flushing unit destined for Jika mounting frames 8.9565.0, 8.9565.1 a 8.9565.2
- system reacts to the user attendance in active range of the sensor at a maximum distance of 0,7 m, minimum stay time in active range is 7,5 s
- water flows after the user leaves active range
- flushing times:
  - „short flushing“ (2 s)  
= min. stay time in active range is 7,5 s, max. stay time is 45 s
  - „long flushing“ (5 s)  
= min. stay time in active range is 45 s
- possibility of additional manual flush by push-button (f.e. during the cleaning)
- automatic hygiene flush after each 8 use of toilet and after 24 hours non-use
- parameters adjustment by remote control SLD 03

## Dimensions

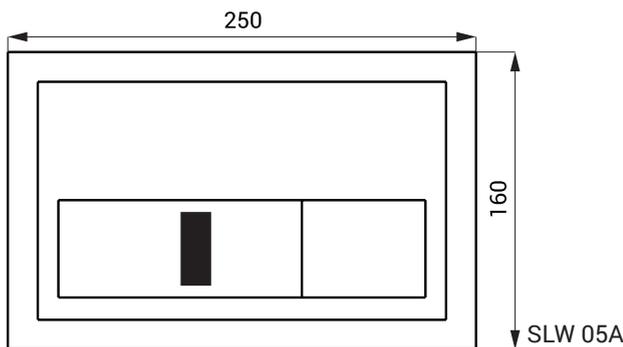

## Technical Specification

Flush plate dimension	250 x 160 mm
Operating voltage	24 V DC
Power input	13 W
Active range	0,6 - 0,75 m

## Supply Specification

SLW 05A - Supply No. 04056 flush plate PL3 Dual Flush (white plastic) with electronics, control mechanism with servomotor

## Recommended Accessories

SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 2 pcs. of flushing units  
SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 4 pcs. of flushing units  
SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 2 pcs. of flushing units  
SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 4 pcs. of flushing units  
SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 7 pcs. of flushing units  
SLD 03 - Supply No. 07030 remote control for an adjustment of parameters