



# Automatic Toilet Flushing Unit for Geberit Mounting Frames SLW 02GT

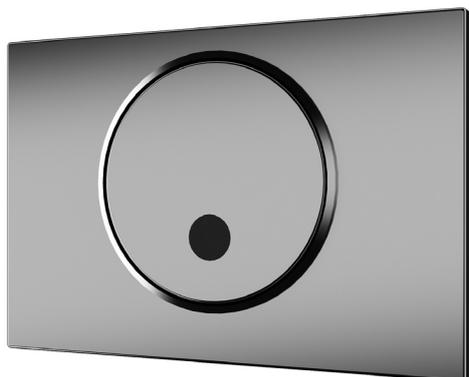

## Characteristics

- flushing unit destined for Geberit mounting frames KOMBIFIX: 110.367.00.5, 110.300.00.5, DUOFIX SPECIAL: 111.355.00.5, DUOFIX: 111.300.00.5, 111.367.00.5, 111.350.00.5, 111.390.00.5
- system reacts to the user attendance in active range of the sensor at a maximum distance of 0,7 m, minimum stay time in active range is 7,5 s
- water flows after the user leaves active range
- flushing times:
  - „short flushing“ (2 s)  
= min. stay time in active range is 7,5 s, max. stay time is 45 s
  - „long flushing“ (5 s)  
= min. stay time in active range is 45 s
- adjustable long flushing time 0,5 - 15,5 s
- possibility of additional manual flush by push-button (f.e. during the cleaning)
- automatic hygiene flush after each 8 use of toilet and after 24 hours non-use
- parameters adjustment by remote control SLD 03

## Dimensions

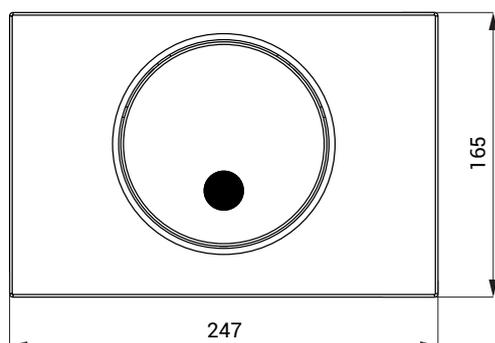

## Technical Specification

Flush plate dimension	247 x 165 mm
Weight	1,12 kg
Operating voltage	24 V DC
Power input	13 W
Active range	0,63 - 0,75 m

## Supply Specification

SLW 02GT - Supply No. 14022 stainless steel flush plate SIGMA 10 with electronics, control mechanism with servomotor

## Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 2 pcs. of flushing units
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 4 pcs. of flushing units
SLZ 04Y	- Supply No. 05042	power supply 24 V DC on DIN rail, for operating of max. 2 pcs. of flushing units
SLZ 04Z	- Supply No. 05041	power supply 24 V DC on DIN rail, for operating of max. 4 pcs. of flushing units
SLZ 04X	- Supply No. 10049	power supply 24 V DC on DIN rail, for operating of max. 7 pcs. of flushing units
SLD 03	- Supply No. 07030	remote control for an adjustment of parameters