

Radar Flushing Unit for Urinal D-Code SLP 54RS



SANELA
we make water cool®


Characteristics



- radar flushing unit for urinal D-Code (Duravit) No. 082930
- includes Bluetooth control (Sanela Control app available for download)
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or the SLD 04 remote control (acoustic indication of setting) without dismantling the urinal
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing



Installation Drawing

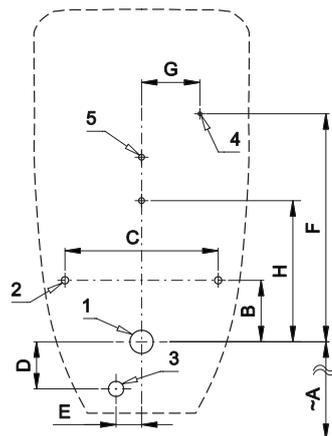

- 1 - water outlet Ø 32 mm
- 2 - holes for fitting
- 3 - water supply
- 4 - power supply 24 V DC or 230 V AC
- 5 - holes for wall plug

Dimensions (mm)	A	B	C	D	E	F	G	H
SLP 54 - D - Code	480	85	210	65	35	315	80	195

* for the height of the front edge of the urinal 650 mm above the floor

Technical Specification

Operating voltage

- SLP 54RS 24 V DC
- SLP 54RZ 230 V AC/50 Hz
- SLP 54RB 6 V

Power input

- operating by 24 V DC 8 W
- operating by 6 V 3 W

Recommended flow pressure

- 0,1 - 0,6 MPa

Rate of flow

Water inlet

Water outlet

Illustrative photo:



SLA 11



SLA 11A



SLA 11B



SLA 11C

Supply Specification

- SLP 54RS - Supply No. 11545 radar flushing unit including Bluetooth module on the mounting rail, electromagnetic valve, connecting hoses, angle valve with filter and check valve, inlet fitting with a rubber sealing, paper drill template, power supply (SLP 54RZ), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 54RB)
- SLP 54RZ - Supply No. 01545
- SLP 54RB - Supply No. 01541

Recommended Accessories

SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X	-	Supply No. 10049	power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06	-	Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 04	-	Supply No. 07040	remote control for an adjustment of parameters
SLA 11	-	Supply No. 06110	deodorising urinal screen - orange colour, mango scent
SLA 11A	-	Supply No. 06111	deodorising urinal screen - red colour, kiwi and grapefruit scent
SLA 11B	-	Supply No. 06112	deodorising urinal screen - transparent colour, honeysuckle scent
SLA 11C	-	Supply No. 06113	deodorising urinal screen - blue colour, cotton bloom scent
SLR 09	-	Supply No. 08090	mounting frame for ceramic urinals with built-in flush or for ceramic washbasins
SLA 36	-	Supply No. 06360	set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)
SANELA CONTROL APP			available for download on the App Store and Play Store