



Safety Eyewash Shower SLSN 27

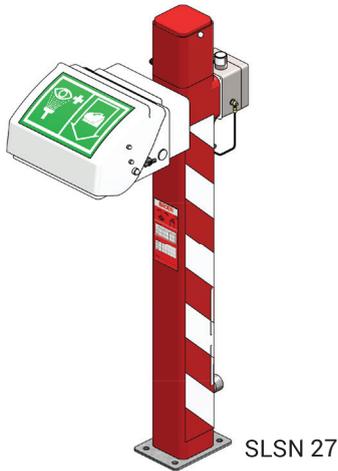

Characteristics

- suitable for medical facilities and industry
- used as first aid if eyes impacted by accidents caused by fire, chemical or other dangerous substances
- free standing outdoor eyewash shower with heating, till max. -20°C
- supplied with a durable integrated lid, flow controller and self-adhesive label
- floor installation
- made of galvanized steel

Dimensions

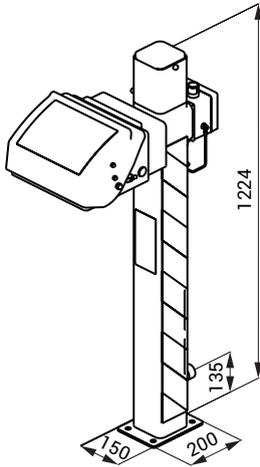

Technical Specification

Operating voltage	230 V AC, 50/60 Hz
Min. work pressure	0,02 MPa
Min. operating temperature	-20°C
Rate of flow	20 l/min. (inf. data)
Water inlet	male thread G 1 1/4"

Supply Specification

SLSN 27 - Supply No. 92270 eyewash shower