

# Time-controlled Flushing Unit SLP 01Z




## Characteristics



- **vandal-proof**
- time-controlled flushing unit for urinal troughs  
SLPN 02(Z) - 05(Z)
- adjustable flushing time 0,5 - 15,5 s, standard 5 s
- parameters adjustment by remote control SLD 04
- adjustable flushing interval 10 min - 3 days, standard 1 h
- after switch on the power supply 230 V AC, SLP 01Z starts to flush in adjusted interval

## Installation Drawing

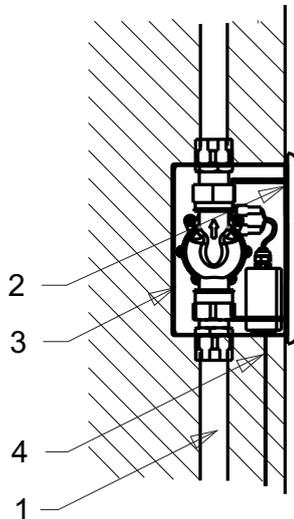

- 1 - water supply
- 2 - stainless steel cover with electronics
- 3 - mounting box
- 4 - power supply

## Technical Specification

<b>Stainless steel cover dimension</b>	170 x 170 x 10 mm
<b>Mounting box dimension</b>	145 x 155 x 100 mm
<b>Operating voltage</b>	
▪ SLP 01Z	230 V AC/50 Hz
<b>Recommended flow pressure</b>	0,15 - 0,6 MPa
<b>Rate of flow</b>	70 l/min. by the pressure 0,15 MPa (inf. data)
<b>Water inlet</b>	Ø min. 32 mm (PN 16) male thread G 1"
<b>Water outlet</b>	male thread G 1"

## Supply Specification

SLP 01Z - Supply No. 01011

stainless steel cover with electronics, stainless steel mounting box with brass screw coupling, power supply, remote control SLD 04