

Automatic Wall-mounted Urinal Flushing Unit SLP 09K



SANELA 
we make water cool®




Characteristics



- includes Bluetooth control (Sanela Control app available for download)
- for urinals with upper inlet
- system reacts to the user attendance in front of the urinal at a maximum distance of 0,7 m, minimum stay time in active range is 7,5 s
- water flows after the user leaves active range
- adjustable flushing time 0,5 - 15,5 s
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or remote control SLD 03
- automatic hygiene flushing after 24 hours non-use
- monitoring of battery capacity
- water flow could be regulated by ball valve

Installation Drawing

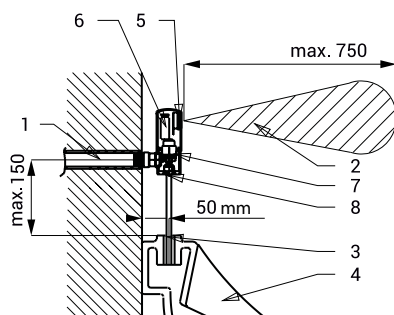

- 1 - water supply
- 2 - active range
- 3 - waste outlet
- 4 - urinal
- 5 - electronics
- 6 - operating battery
- 7 - electromagnetic valve
- 8 - chromed body

Technical Specification

Dimension of the flushing unit body	40 x 50 mm
Operating voltage	9 V
Power input	
▪ operating by 9 V	2 W
Battery life	
▪ lithium 9 V/1200 mAh	approx. 2 years (100 uses per day)
Active range	0,6 - 0,75 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	18 l/min (inf.data)
Water inlet	male thread G 1/2"
Water outlet	stainless steel tube with outer diameter 15 mm
Length of the tube	205 mm

Supply Specification

SLP 09K - Supply No. 01092 chromed body with electronics including Bluetooth module, cartridge valve, ball valve with brass screw coupling, stainless steel cover, waste pipeline, rubber sealing, lithium battery SLA 09

Recommended Accessories

SLD 03 - Supply No. 07030 remote control for an adjustment of parameters
SLA 09 - Supply No. 06090 lithium battery 9 V/1200 mAh
SANELA CONTROL APP paid Sanela Control app available for download on the App Store and Google Play