

# Stainless Steel Automatic Washing Troughs SLUN 80E, SLUN 81E, SLUN 82E, SLUN 83E




## Characteristics

- economical aerator, rate of flow 6 l/min
- hygienic flush
- vandal-proof
- suitable for medical facilities
- stainless steel wall hung washing troughs with integrated electronics
- vandal-proof stainless steel spouts and sensing heads
- SLUN 80E, ET - length 1250 mm (2 pcs. of electronics)
- SLUN 81E, ET - length 1900 mm (3 pcs. of electronics, 1 pc. of bracket)
- SLUN 82E, ET - length 2500 mm (4 pcs. of electronics, 2 pcs. of brackets)
- SLUN 83E, ET - length 3000 mm (5 pcs. of electronics, 2 pcs. of brackets)
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 - 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03
- temperature is regulated by angle valves (for models with index E) or by thermostatic valve (for models with index ET)
- different lengths could be made to order
- material AISI - 304
- could be made to order from stainless steel AISI - 316L
- brushed finish



SLUN 82E

## Dimensions

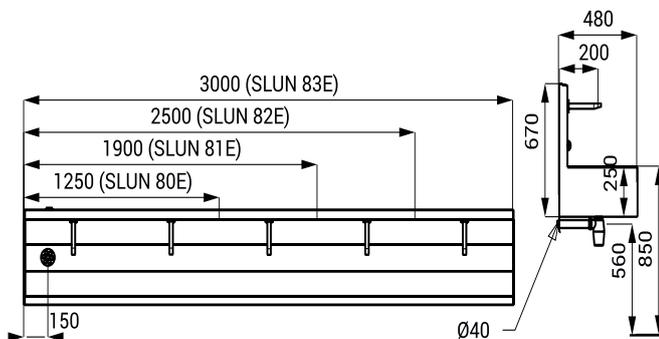

## Technical Specification

<b>Operating voltage</b>	24 V DC
<b>Power input</b>	
▪ SLUN 80E, ET	14 W
▪ SLUN 81E, ET	20 W
▪ SLUN 82E, ET	27 W
▪ SLUN 83E, ET	33 W
<b>Active range</b>	0,23 - 0,31 m
<b>Recommended flow pressure</b>	0,1 - 0,6 MPa
<b>Rate of flow</b>	6 l/min. (inf. data)
<b>Water inlet</b>	male thread G 1/2"

## Supply Specification

- SLUN 80E - Supply No. 93801
- SLUN 81E - Supply No. 93811
- SLUN 82E - Supply No. 93821
- SLUN 83E - Supply No. 93831
- SLUN 80ET - Supply No. 93803
- SLUN 81ET - Supply No. 93813
- SLUN 82ET - Supply No. 93823
- SLUN 83ET - Supply No. 93833

stainless steel washing trough with electronics and spouts, electromagnetic valve (pcs. according to number of electronics), connecting hoses, angle valve with check valve (2 pcs.), siphon, mounting set, thermostatic valve (for models with index ET), supportive stainless steel bracket (pcs. according to trough length)

## Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 4 pcs. of spouts
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 8 pcs. of spouts
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of spouts
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 8 pcs. of spouts
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 14 pcs. of spouts
SLD 03	- Supply No. 07030	remote control for an adjustment of parameters
SLA 56A	- Supply No. 06560	economical aerator 3,8 l/min
SLA 56B	- Supply No. 06561	economical aerator 1,9 l/min