



### Solenoid valve and contactor distributor

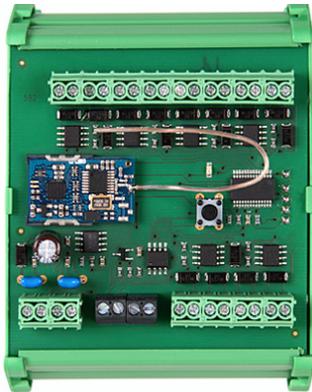

SLZA 15

### Push buttons distributor on DIN rail

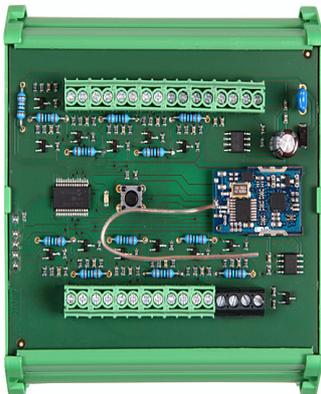

SLZA 17

### Contactor 24 V DC



SLZA 53

### Characteristics

- is required for use in a set with SLZA 02xx, where it switches solenoid valves
- is required for use in a set with SLZA 04xx, where it switches contactors of single-phase devices
- placed on DIN rail into the switchboard

### Technical Specification

Operating voltage	24 V DC
Power input	max. 1 W + (1-12 depends on the number of valves * 6,5 W)
Number of modules	4,15

### Supply Specification

SLZA 15	-	Supply No. 88150	solenoid valve and contactor distributor
---------	---	------------------	--

### Characteristics

- necessary for use in set with SLZA 02xx
- connecting with max. 12 buttons
- arrange connection between piezo buttons on the shower panels and shower timer
- placed on DIN rail into the switchboard

### Technical Specification

Operating voltage	24 V DC
Power input	max. 2 W
Number of modules	5,15

### Supply Specification

SLZA 17	-	Supply No. 88170	push buttons distributor
---------	---	------------------	--------------------------

### Characteristics

- possible for use in set with SLZA 41xx or SLZA 04xx
- change power load 230 V AC into 20 A
- is placed on DIN rail into the switchboard

### Technical Specification

Operating voltage	24 V DC
Switching voltage	230 V AC
Max. switched current	20 A
Number of switched contacts	1
Number of modules	1

### Supply Specification

SLZA 53	-	Supply No. 88530	contactor 24 V DC
---------	---	------------------	-------------------