


# Automatic Thermostatic Washbasin Tap for Sink SLU 24D



## Characteristics

- hygienic flush
- fixed faucet
- is destined for cold and hot water, temperature is regulated by thermostatic mixer
- safety fuse against scalding
- stop flowing of hot water till 1 s in case of cold water failure
- pressure of hot and cold water must be same
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 – 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

## Dimensions

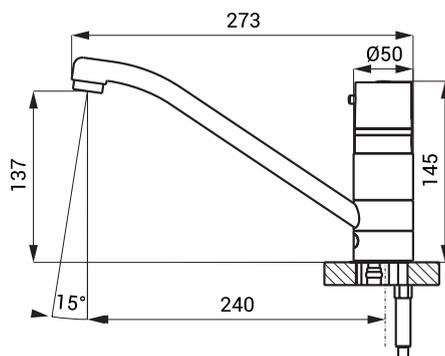

## Technical Specification

### Operating voltage

- SLU 24D 24 V DC
- SLU 24DB 6 V

### Power input

- operating by 24 V DC 13 W
- operating by 6 V 11 W

### Battery life

- 4 pcs. AA alkaline batteries approx. 2 years  
AA, 1,5 V, 2700 mAh (100 uses per day)

### Active range

- standard 0,17 - 0,25 m
- START/STOP program 0,05 - 0,15 m

### Recommended flow pressure

- 0,1 - 0,6 MPa

### Rate of flow

- 12 l/min. (inf. data)

### Water inlet

- male thread G 1/2"

## Supply Specification

SLU 24D - Supply No. 13241

SLU 24DB - Supply No. 13242

elongated faucet with thermostat and electronics, holder of electronics, electromagnetical valve (2 pcs.), connecting hoses, angle valve with filter and check valve (2 pcs.), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLU 24DB)

## Recommended Accessories

SLZ 01Y - Supply No. 05012

SLZ 01Z - Supply No. 05011

SLZ 04Y - Supply No. 05042

SLZ 04Z - Supply No. 05041

SLZ 04X - Supply No. 10049

SLD 03 - Supply No. 07030

SLA 36 - Supply No. 06360

SLA 55A - Supply No. 06550

SLA 55B - Supply No. 06551

power supply 24 V DC for operating of max. 2 pcs. of washbasin taps

power supply 24 V DC for operating of max. 4 pcs. of washbasin taps

power supply 24 V DC for DIN rail, for operating of max. 2 pcs. of washbasin taps

power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of washbasin taps

power supply 24 V DC for DIN rail, for operating of max. 7 pcs. of washbasin taps

remote control for an adjustment of parameters

set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)

economical aerator 3,8 l/min

economical aerator 1,9 l/min