

# Coin and Token Shower Timers for Four to Twelve Showers

## SLZA 02M, SLZA 02MZ



SLZA 02M





SLZA 02MZ

### Characteristics





- hygienic flush
- vandal-proof
- choice of shower by the machine
  - after inserting a coin or a token the device assigns the shower to the user and shows the number of shower on display
- direct control
  - after inserting a coin or a token the device starts water flow on several seconds to indicate the chosen shower
  - after set delay the device starts water flow for paid time
- 30 s before the end of water supply the user is warned by interrupting of water flow
- the device adds up the coins but does not return
- index Z - recessed
- parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, possible activation of hygienic flush, current euro exchange, token value, display contrast, possibility switch off some from showers)
- marking of the buttons by symbols could be made to order
- the possibility of obtaining the statistical information, device diagnostics
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish

### Installation Drawing

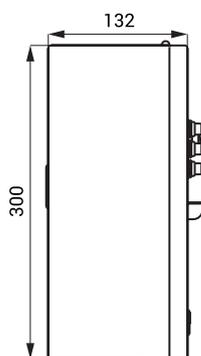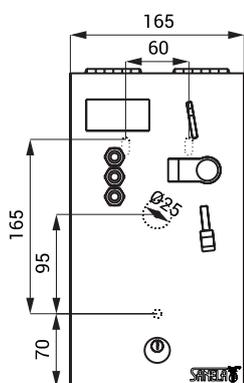

SLZA 02M

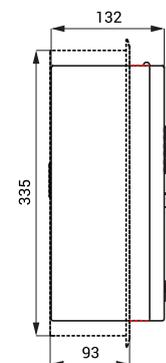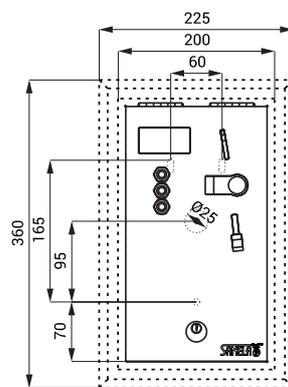

SLZA 02MZ

### Technical Specification

Niche dimensions (index Z)	335 x 200 x 125 mm
<b>Dimensions</b>	
▪ SLZA 02M	300 x 165 x 132 mm
▪ SLZA 02MZ	360 x 225 x 132 mm
<b>Weight</b>	
▪ SLZA 02M	4,5 kg
▪ SLZA 02MZ	6,2 kg
<b>Thickness of material</b>	1,5 mm
<b>Operating voltage</b>	24 V DC
<b>Power input</b>	91 W
	(depends on the accessories and the number of showers)
<b>Accepted coins</b>	1 and 2 €, token (other currencies on request)
<b>Switch on delay</b>	0 - 255 sec., standard 30 sec.
<b>Showering time</b>	5 - 1200 sec.

## Supply Specification

- SLZA 02M - Supply No. 88021 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 02MZ - Supply No. 88022 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

## Required Accessories



SLZA 15	88150	Valves distributor on DIN rail
---------	-------	--------------------------------



SLZA 20	88200	Shower control without piezo button - premixed water
---------	-------	---------------------------------------------------------



SLZA 20H	88205	Shower control without piezo button - for cold and hot water, temperature regulated by mixer
----------	-------	-------------------------------------------------------------------------------------------------



SLZA 20T	88206	Shower control without piezo button - for cold and hot water, temperature regulated by thermostatic mixer
----------	-------	--------------------------------------------------------------------------------------------------------------

- thermostatic valve nut spanner SLA 64



SLZA 21	88210	Stainless steel shower panel without piezo button - premixed water
---------	-------	--------------------------------------------------------------------



SLZA 21H	88215	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by mixer
----------	-------	------------------------------------------------------------------------------------------------------------



<b>SLZA 21T</b>	<b>88216</b>	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by thermostatic mixer
-----------------	--------------	-------------------------------------------------------------------------------------------------------------------------

## Recommended Accessories

<b>SLZ 01Y</b>	- <b>Supply No. 05012</b>	power supply 24 V DC for operating of max. 5 pcs. of showers
<b>SLZ 01Z</b>	- <b>Supply No. 05011</b>	power supply 24 V DC for operating of max. 9 pcs. of showers
<b>SLZ 04Y</b>	- <b>Supply No. 05042</b>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
<b>SLZ 04Z</b>	- <b>Supply No. 05041</b>	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
<b>SLZ 04X</b>	- <b>Supply No. 10049</b>	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
<b>SLD 05</b>	- <b>Supply No. 07050</b>	remote control for an adjustment of parameters
<b>SLA 03</b>	- <b>Supply No. 06030</b>	vandal-proof shower head
<b>SLA 39</b>	- <b>Supply No. 06390</b>	vandal-proof shower head
<b>SLA 40</b>	- <b>Supply No. 06400</b>	vandal-proof shower head with possibility to set an angle of water flow
<b>SLA 64</b>	- <b>Supply No. 06640</b>	thermostatic valve nut spanner (SLZA 20T)
<b>SLZA 50</b>	- <b>Supply No. 88500</b>	set of 50 pcs. of tokens for coin device