

# Ceramic Urinal with the Radar Flushing Unit SLP 82RS




SLP 82 - WCA - Sanindusa

## Characteristics



- economy flushing by 1 liter of water
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing

## Installation drawing

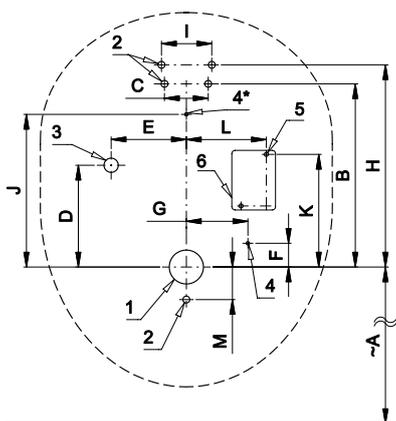

- 1 - waste outlet Ø 50 mm
- 2 - 5 x holes for fitting
- 3 - water inlet G 1/2"
- 4 - power supply 24 V DC or 230 V AC
- 5 - 2 x holes for wall plugs Ø 6 mm (SLP 82RZ)
- 6 - power supply (SLP 82RZ)

Dimensions (mm)	A	B	C	D	E	F	G	H	I	J	K	L	M
SLP 82 - WCA	500	270	74	150	110	35	90	298	130	225	166	117	48

\* for the height of the front edge of the urinal 650 mm above the floor

## Supply Specification

- SLP 82RS - Supply No. 01820 ceramic urinal with the radar flushing unit, electromagnetic valve, connecting hoses,
- SLP 82RZ - Supply No. 01822 angle valve, inlet fitting, siphon, paper drill template, mounting set, power supply
- SLP 82RB - Supply No. 01821 (SLP 82RZ), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 82RB)

## Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 5 pcs. of flushing units
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units
- SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
- SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
- SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
- SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit
- SLD 04 - Supply No. 07040 remote control for an adjustment of parameters
- SLA 11 - Supply No. 06110 deodorising urinal screen - orange colour, mango scent
- SLA 11A - Supply No. 06111 deodorising urinal screen - red colour, kiwi and grapefruit scent
- SLA 11B - Supply No. 06112 deodorising urinal screen - transparent colour, honeysuckle scent
- SLA 11C - Supply No. 06113 deodorising urinal screen - blue colour, cotton bloom scent
- SLA 36 - Supply No. 06360 set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)

## Technical Specification

### Operating voltage

- SLP 82RS 24 V DC
- SLP 82RZ 230 V AC/50 Hz
- SLP 82RB 6 V

### Power input

- operating by 24 V DC 8 W
- operating by 6 V 3 W

### Recommended flow pressure

- Rate of flow 0,1 - 0,6 MPa
- Water inlet 18 l/min (inf. data)
- Water outlet male thread G 1/2" inlet fitting

