

# Automatic Washbasin Mixers SLU 08N, SLU 08ND



SLU 08ND


SLU 08N

## Characteristics



- economical aerator, rate of flow 6 l/min
- hygienic flush
- suitable for medical facilities
- index „D“ - higher faucet
- are destined for cold and hot water, temperature is regulated by mixer
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 – 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

## Dimensions

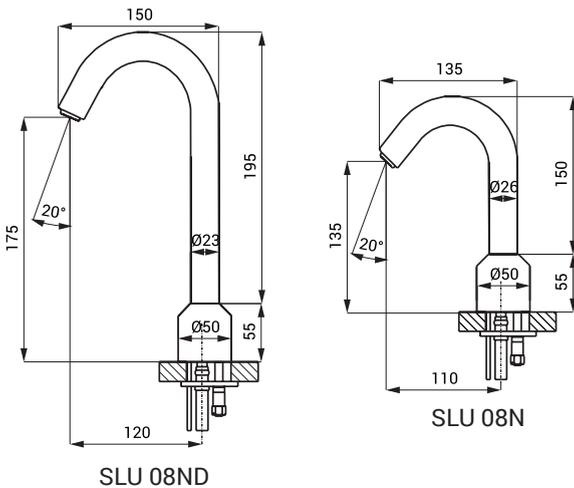

SLU 08ND

SLU 08N

## Technical Specification

### Operating voltage

- SLU 08N, 08ND 24 V DC
- SLU 08NB, 08NDB 6 V

### Power input

- operating by 24 V DC 13 W
- operating by 6 V 5 W

### Battery life

- 4 pcs. AA alkaline batteries approx. 2 years (100 uses per day)
- AA, 1,5 V, 2700 mAh

### Active range

- standard 0,13 - 0,19 m
- START/STOP program 0,05 - 0,15 m

### Recommended flow pressure

- 0,1 - 0,6 MPa

### Rate of flow

- 6 l/min. (inf. data)

### Water inlet

- male thread G 1/2"

## Supply Specification

SLU 08N	- Supply No. 23088	faucet with mixer and electronics, electromagetic valve (2 pcs.),
SLU 08NB	- Supply No. 23089	connecting hoses, angle valve with filter and check valve (2 pcs.), 4 pcs. AA alkaline
SLU 08ND	- Supply No. 63088	batteries 1,5 V, 2700 mAh with battery case (for models with index B)
SLU 08NDB	- Supply No. 63089	

## Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 2 pcs. of washbasin taps
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 4 pcs. of washbasin taps
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 2 pcs. of washbasin taps
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of washbasin taps
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 7 pcs. of washbasin taps
SLD 03	- Supply No. 07030	remote control for an adjustment of parameters
SLA 36	- Supply No. 06360	set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)