

# Automatic Black Stainless Steel Wall-mounted Soap Dispenser SLZN 83EV




SLZN 83EV

## Characteristics

- easy soap refilling
- soap economy
- one dose of soap is flowing as hands are in the active range of the sensor (can be set in range 1,3 - 13 s), standard 2,6 s
- container for soap 1 l
- parameters adjustment using by the remote control SLD 03

## Installation Drawing

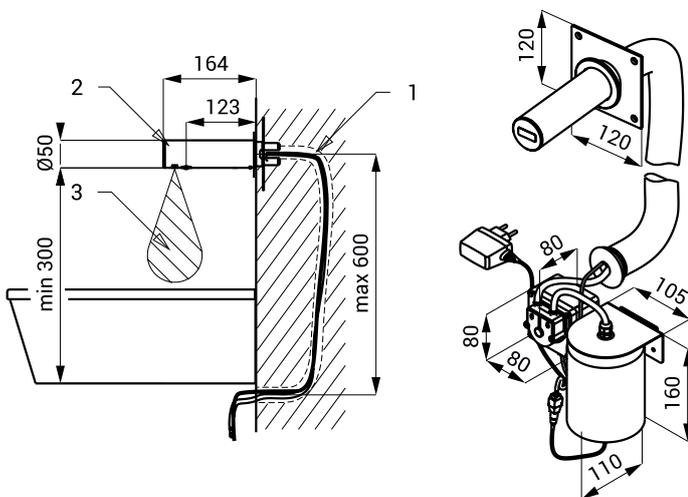

- 1 - soap supply and power supply  
24 V DC in security tube  
2 - stainless steel spout  
3 - active range

## Technical Specification

Operating voltage	230 V AC
Power input	3 W
Active range	0,11 - 0,15 m
Recommended soap viscosity	10 mPa*s - 5000 mPa*s

(don't use chemical solvents and disinfection)



## Supply Specification

**SLZN 83EV - Supply No. 85837** black stainless steel spout with electronics, grip plate, inlet hoses and cables, security tube 80 cm, peristaltic pump for liquid soap and container for liquid soap 1 l, SLZ 07 - wall socket power supply 230 V AC/ 24 V DC

## Recommended Accessories

<b>SLD 03</b>	- Supply No. 07030	remote control for an adjustment of parameters
<b>SLZ 01Y</b>	- Supply No. 05012	power supply 24 V DC for operating of max. 10 pcs. of soap dispensers
<b>SLZ 01Z</b>	- Supply No. 05011	power supply 24 V DC for operating of max. 20 pcs. of soap dispensers
<b>SLZ 04Y</b>	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 10 pcs. of soap dispensers
<b>SLZ 04Z</b>	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 20 pcs. of soap dispensers
<b>SLZ 04X</b>	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 30 pcs. of soap dispensers