

# Stainless Steel Urinal Trough with Hidden Flushing Unit SLPN 04C




SLPN 04C

## Characteristics



- vandal-proof
- stainless steel wall hung urinal trough with integrated electronics
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04
- automatic hygiene flushing after 6 hours non-use
- different lenghts could be made to order
- material AISI - 304
- brushed finish

## Dimensions

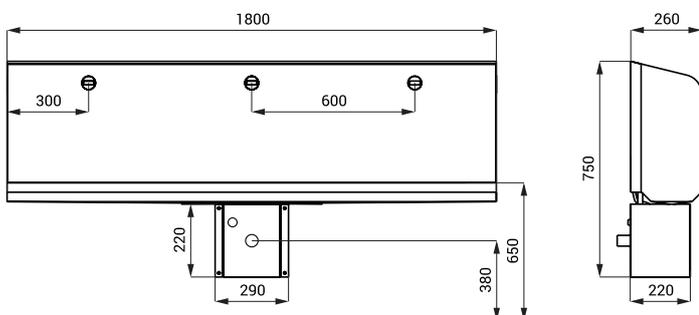

\* for the height of the front edge of the urinal 650 mm above the floor

## Technical Specification

### Operating voltage

- SLPN 04C 24 V DC
- SLPN 04CB 6 V

### Power input

- operating by 24 V DC 7 W
- operating by 6 V 3 W

### Battery life

- 4 pcs. AA alkaline batteries approx. 2 years (100 uses per day)

AA, 1,5 V, 2700 mAh

### Recommended flow pressure

0,15 - 0,6 MPa

### Rate of flow

36 l/min. by the pressure

0,3 MPa (inf. data)

Ø min. 25 mm (PN 16)

male thread G 1/2"

### Water inlet

## Supply Specification

SLPN 04C - Supply No. 91043

SLPN 04CB - Supply No. 91044

stainless steel urinal trough 1800 mm with flushing head (3 pcs.), electronics (1 pc.), electromagnetic valve (1 pc.), angle valve with a filter, mounting set, cover for siphon, siphon, 4 pcs. AA alkaline batteries 1,5 V 2700 mAh (SLPN 04CB)

## Recommended Accessories

SLZ 01Y - Supply No. 05012

SLZ 01Z - Supply No. 05011

SLZ 04Y - Supply No. 05042

SLZ 04Z - Supply No. 05041

SLZ 04X - Supply No. 10049

SLZ 06 - Supply No. 05012

SLD 04 - Supply No. 07040

SLA 36 - Supply No. 06360

power supply 24 V DC for operating of max. 5 pcs. of urinal troughs

power supply 24 V DC for operating of max. 9 pcs. of urinal troughs

power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of urinal troughs

power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of urinal troughs

power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of urinal troughs

power supply 24 V DC for operating of max. 1 pc. of urinal trough

remote control for an adjustment of parameters

set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)