


# Power supplies SLZ 01 - SLZ 07

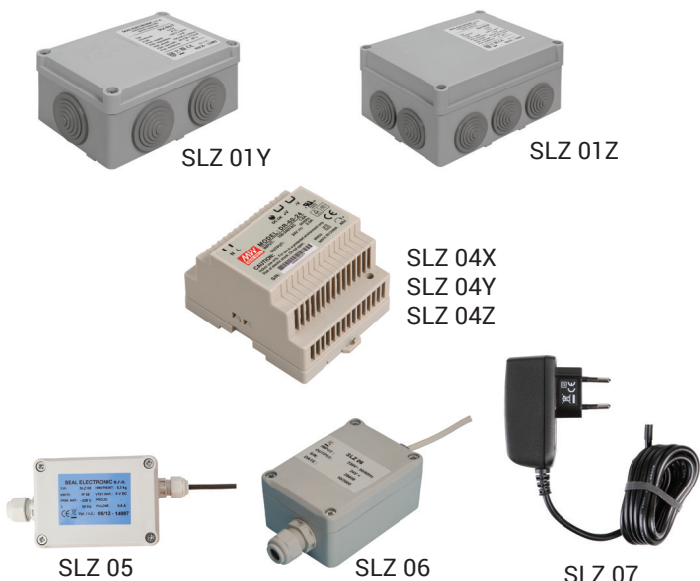

## Characteristic

- power supplies are destined only for a supply of the automatic sanitary electronics SANELA products (with the exception of battery operated products and products with an integrated power supply)
- power supplies SLZ 04Y, SLZ 04Z and SLZ 04X are destined for installation on DIN rail, into the switchboard

## Technical Specification

Power input	230 V AC/50 Hz
Power output	stab. 24 V DC

## Installation recommendations

- installation of the electrical set has to conform with the provided norms and it could be done only by the skilled person
- power supplies SLZ 01Y, SLZ 01Z, SLZ 06 is possible to mount on the surface, eventually it could be embedded to the wall outside of users reach (e. g. ceiling, vestibule)
- for the operating voltage supply is recommended to use line wire CYKY 2C x 1,5, for the 24 V DC output voltage distribution wire line CYKY 2A x 1,5 (max. 40 m)
- the output from the built in power supply is made up of a twin-lead connection that connects to the electricity terminals, 230 V/50 Hz, supply cable is fed into the mounting box via a grommet
- after the control of right function of the product with integrated power supply (with index Z) it is necessary the cover with electronics tightly seal around the perimeter by a sanitary sealant that the water can not penetrate into space where is placed the network transformers

## Supply Specification

SLZ 01Z	- Supply No. 05011	power supply 230 V AC/ 24 V DC
SLZ 01Y	- Supply No. 05012	power supply 230 V AC/ 24 V DC
SLZ 04Y	- Supply No. 05042	power supply on DIN rail, 85-240 V AC/24 V DC
SLZ 04Z	- Supply No. 05041	power supply on DIN rail, 85-240 V AC/24 V DC
SLZ 04X	- Supply No. 10049	power supply on DIN rail, 85-240 V AC/24 V DC
SLZ 05	- Supply No. 05050	power supply for battery products, alternative to 9 V/6 V battery
SLZ 06	- Supply No. 05060	power supply for one valve, 230 V AC/24 V DC
SLZ 07	- Supply No. 05070	wall socket power supply 230 V AC/24 V DC

Article No.	Automatic washbasin taps and shower controls	Automatic urinal flushing unit	Automatic pressure toilet flushing units SLW 01xx	Automatic cistern toilet flushing unit SLW 02xx	Automatic cistern toilet flushing unit SLW 02GT	Dimensions (mm)
SLZ 01Y	max. 5 valves	max. 5 valves	max. 5 valves	2 x servo-motor	—	140 x 100 x 60
SLZ 01Z	max. 9 valves	max. 9 valves	max. 9 valves	4 x servo-motor	max. 2 magnets	170 x 130 x 80
SLZ 04Y	max. 5 valves	max. 5 valves	max. 5 valves	2 x servo-motor	—	78 x 93 x 56
SLZ 04Z	max. 9 valves	max. 9 valves	max. 9 valves	4 x servo-motor	max. 2 magnets	78 x 93 x 56
SLZ 04X	max. 15 valves	max. 15 valves	max. 15 valves	7 x servo-motor	max. 3 magnets	100 x 93 x 56
SLZ 06	max. 1 valve	max. 1 valve	max. 1 valve	—	—	90 x 65 x 45
SLZ 07	max. 2 valves	max. 2 valves	max. 2 valves	1 x servo-motor	—	75 x 34 x 43