

# Ceramic Urinal with the Radar Flushing Unit SLP 20R



**SANELA**  
we make water cool®




SLP 20 - ANTERO

## Characteristics



- includes Bluetooth control (Sanela Control app available for download)
- easy installation
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or the SLD 04 remote control (acoustic indication of setting) without dismantling the urinal
- automatic flushing after each 6 hours non-use
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing

## Installation Drawing

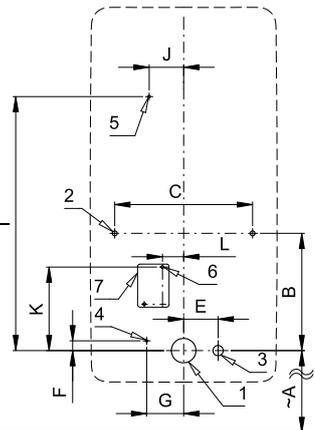

- 1 - waste outlet  $\varnothing$  50 mm
- 2 - holes for fitting
- 3 - water supply
- 4 - power supply 230 V AC (SLP 20RZ)
- 5 - power supply 24 V DC (SLP 20R)
- 6 - holes for wall plug
- 7 - power supply

SLP 20

Dimensions (mm)	A	B	C	E	F	G	I	J	K	L
SLP 20 - ANTERO	350	240	280	70	20	75	520	70	171	43

\* for the height of the front edge of the urinal 650 mm above floor

## Supply Specification

- SLP 20R - Supply No. 01204 ceramic urinal with radar flushing unit including Bluetooth module, electromagnetic valve, connecting hoses, angle valve with a filter and check valve, inlet fitting with a rubber sealing, mounting set, power supply (SLP 20RZ)
- SLP 20RZ - Supply No. 01205

## Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 5 pcs. of flushing units
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units
- SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
- SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
- SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
- SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit
- SLD 04 - Supply No. 07040 remote control for an adjustment of parameters
- SLA 11 - Supply No. 06110 deodorising urinal screen - orange, mango scent
- SLA 11A - Supply No. 06111 deodorising urinal screen - red, kiwi and grapefruit scent
- SLA 11B - Supply No. 06112 deodorising urinal screen - transparent, honeysuckle scent
- SLA 11C - Supply No. 06113 deodorising urinal screen - blue, cotton bloom scent
- SLR 09 - Supply No. 08090 mounting frame for ceramic urinals with built-in flush or for ceramic washbasins
- SANELA CONTROL APP available for download on the App Store and Play Store

## Technical Specification

### Operating voltage

- SLP 20R 24 V DC
- SLP 20RZ 230 V AC/50 Hz

### Power input

- operating by 24 V DC 8 W

### Recommended flow pressure

- 0,1 - 0,6 MPa

### Rate of flow

- 18 l/min (inf. data)

### Water inlet

### Water outlet

- male thread G 1/2" inlet fitting with a rubber seal



SLA 11



SLA 11A



SLA 11B



SLA 11C