

Stainless Steel Cleaner's Sink SLVN 02E



SANELA
we make water cool®




Characteristics



- includes Bluetooth control
(paid Sanela Control app available for download)
- economical aerator, rate of flow 6 l/min
- hygienic flush
- suitable for medical facilities
- SLVN 02E - stainless steel floor standing combined cleaner's sink with washbasin, grating and automatic tap SLU 08LND (swivel faucet, START/STOP program)
- SLVN 02EB - stainless steel floor standing combined cleaner's sink with washbasin, grating and automatic tap SLU 08LNDB (swivel faucet, START/STOP program)
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or the SLD 03
- material stainless steel AISI 304 (1.4301)
- brushed finish

Dimensions

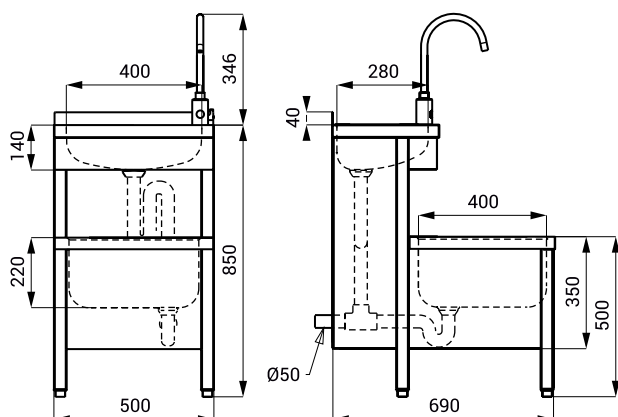

Technical Specification

Dimensions	1196 x 690 x 500 mm
Weight	
▪ SLVN 02E	22,5 kg
▪ SLVN 02EB	22,44 kg
Thickness of material	
▪ sink	1 mm
▪ apron	0,8 mm
Operating voltage	
▪ SLVN 02E	24 V DC
▪ SLVN 02EB	6 V
Power input	
▪ operating by 24 V DC	14 W
▪ operating by 6 V	6 W
Battery life	
▪ 4 pcs. AA alkaline batteries	approx. 2 years
AA, 1,5 V, 2700 mAh	(100 uses per day)
Rate of flow	12 l/min. (inf. data)
Water inlet	male thread G 1/2"
Water temperature regulation	integrated mixer

Supply Specification

SLVN 02E - Supply No. 98021
SLVN 02EB - Supply No. 98022

stainless steel cleaner's sink with washbasin, grating, siphon, SLU 08LND (SLVN 02E), SLU 08LNDB and 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLVN 02EB)

Recommended Accessories

SLZ 01Y - Supply No. 05012
SLZ 01Z - Supply No. 05011
SLZ 04Y - Supply No. 05042
SLZ 04Z - Supply No. 05041
SLZ 04X - Supply No. 10049
SLD 03 - Supply No. 07030
SLA 36 - Supply No. 06360
SANELA CONTROL APP

power supply 24 V DC for operating of max. 2 pcs. washbasin taps
power supply 24 V DC for operating of max. 4 pcs. washbasin taps
power supply 24 V DC for DIN rail, for operating of max. 2 pcs. washbasin taps
power supply 24 V DC for DIN rail, for operating of max. 4 pcs. washbasin taps
power supply 24 V DC for DIN rail, for operating of max. 7 pcs. washbasin taps
remote control for an adjustment of parameters
set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)
paid Sanela Control app available for download on the App Store and Google Play