

# Automatic Washbasin Mixer SLU 41N




## Characteristics



- economical aerator, rate of flow 6 l/min
- hygienic flush
- possibility of water temperature adjustment by mixer and follow-up plug by cover
- solenoid valve is in tap body
- is destined for cold and hot water, temperature is regulated by mixer
- water flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range sensor after adjustable time delay (can be set in range 0,25 – 7,75 s)
- function of automatic water stop after 5 minutes of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

## Dimensions

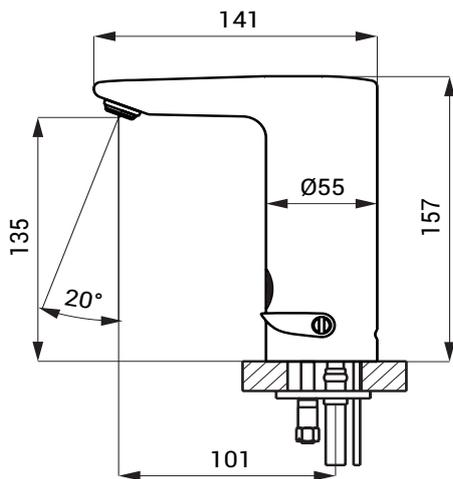

## Technical Specification

### Operating voltage

- SLU 41N 24 V DC
- SLU 41NB 6 V

### Power input

- operating by 24 V DC 2 W
- operating by 6 V 2 W

### Battery life

- 4 pcs. AA alkaline batteries approx. 2 years (100 uses per day)
- AA, 1,5 V, 2700 mAh

### Active range

- standard 0,13 - 0,19 m
- START/STOP program 0,05 - 0,15 m

### Recommended flow pressure

- 0,1 - 0,6 MPa

### Rate of flow

- 6 l/min. (inf. data)

### Water inlet

- male thread G 1/2"

## Supply Specification

SLU 41N - Supply No. 03411

SLU 41NB - Supply No. 03416

faucet with mixer, electronics and solenoid valve, coupling hoses, filter and check valve (2 pcs.), cover for temperature mixer, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLU 41NB)

## Recommended Accessories

SLZ 01Y - Supply No. 05012

SLZ 01Z - Supply No. 05011

SLZ 04Y - Supply No. 05041

SLZ 04Z - Supply No. 05042

SLZ 04X - Supply No. 10049

SLD 03 - Supply No. 07030

SLA 36 - Supply No. 06360

SLA 57A - Supply No. 06570

SLA 57B - Supply No. 06571

power supply 24 V DC operating of max. 10 pcs. washbasin taps

power supply 24 V DC operating of max. 20 pcs. washbasin taps

power supply 24 V DC for DIN rail, operating of max. 10 pcs. washbasin taps

power supply 24 V DC for DIN rail, operating of max. 20 pcs. washbasin taps

power supply 24 V DC for DIN rail, operating of max. 30 pcs. washbasin taps

remote control for an adjustment of parameters

set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)

economical aerator 3,8 l/min

economical aerator 1,9 l/min