


Radar Flushing Unit for FUSION (Hatria) YXE1, YXC3 SLP 99

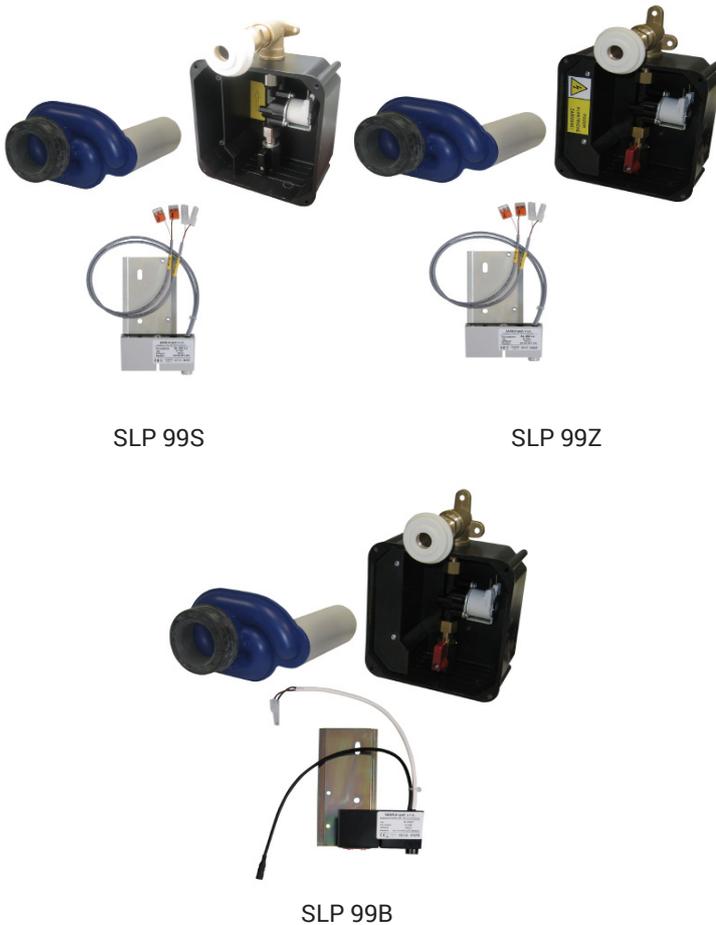

SLP 99S

SLP 99Z


SLP 99B

Characteristics



- **DESIGNED FOR URINAL FUSION (Hatria) YXE1, YXC3**
- includes Bluetooth control (Sanela Control app available for download)
- **THE URINAL DOES NOT HAVE TO BE SENT FOR ASSEMBLY (THE RADAR SENSOR IS SUPPLIED SEPARATELY)**
- SLP 99R - 24 V DC, the product includes a installation box with outlet fitting, it must be embedded in the wall in the space behind the urinal
- SLP 99Z - 230 V AC, including power supply unit
- SLP 99B - 6 V, including housing with 4 pc AA batteries
- economy flushing by 1 liter of water
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or the SLD 04 remote control (acoustic indication of setting) without dismantling the urinal
- automatic flushing after each 6 hours non-use
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing

Installation Drawing

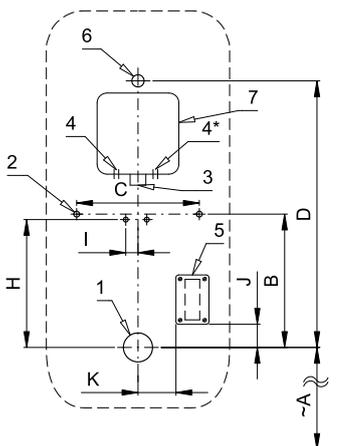

- 1 - water outlet Ø 50 mm
- 2 - 2 x holes for fitting
- 3 - water supply G 3/4"
- 4 - power supply 24 V DC or 230 V AC
- 5 - battery case (SLP 99B)
- 6 - inlet fitting with a rubber sealing
- 7 - mounting box with fittings and valve

Note: the inlet rubber sealing is included in the urinal delivery

Dimensions (mm)	A	B	C	D	H	I	J	K
SLP 99 - FUSION	405	230	210	460	211	20	40	65

* for the height of the front edge of the urinal 650 mm above the floor

Technical Specification

Mounting box dimensions	140 x 140 x 75 mm
Operating voltage	
▪ SLP 99R	24 V DC
▪ SLP 99Z	230 V AC/50 Hz
▪ SLP 99B	6 V
Power input	
▪ operating by 24 V DC	8 W
▪ operating by 6 V	3 W
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min (inf. data)
Water inlet	male thread G 3/4"
Water outlet	inlet fitting with a rubber sealing

Illustrative photo:



SLA 11



SLA 11A



SLA 11B



SLA 11C

Supply Specification

SLP 99R	-	Supply No. 01994	radar flushing unit including Bluetooth module on the mounting rail, mounting box
SLP 99Z	-	Supply No. 21994	with inlet fitting, rubber sealing and electromagnetic valve, siphon, power supply (SLP 99Z),
SLP 99B	-	Supply No. 21996	4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 99B)

Recommended Accessories

SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X	-	Supply No. 10049	power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06	-	Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 04	-	Supply No. 07040	remote control for an adjustment of parameters
SLA 11	-	Supply No. 06110	deodorising urinal screen - orange colour, mango scent
SLA 11A	-	Supply No. 06111	deodorising urinal screen - red colour, kiwi and grapefruit scent
SLA 11B	-	Supply No. 06112	deodorising urinal screen - transparent colour, honeysuckle scent
SLA 11C	-	Supply No. 06113	deodorising urinal screen - blue colour, cotton bloom scent
SLA 36	-	Supply No. 06360	set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)
SANELA CONTROL APP			available for download on the App Store and Play Store