

Hybrid Sink Faucet SLU 68



Characteristics




- includes Bluetooth control (paid Sanela Control app available for download)
- hygienic flush
- swivel spout
- pull-out shower

Hybrid design:

- water activation by touchless sensor:
 - responds to the presence of a hand in the sensing zone by immediately starting the water
 - a second approach of the hand stops the water
 - temperature adjustment by thermostat under the sink
 - the product includes a socket power supply
- water activation by lever:
 - manual control of temperature and water flow by lever

Dimensions

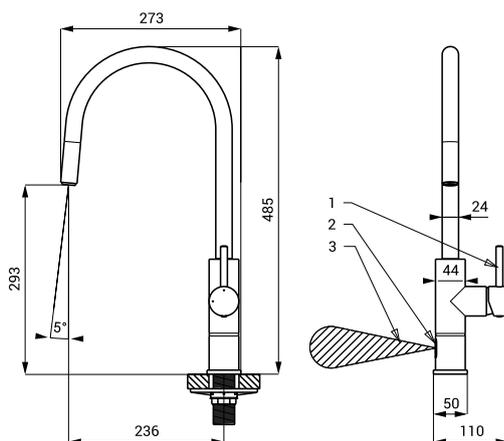

- 1 - manual lever
2 - electronics
3 - sensing area

Technical Specification

Dimensions	273 x 485 mm
Weight	
▪ SLU 68	2,46 kg
▪ SLU 68B	2,46 kg
Operating voltage	
▪ SLU 68	24 V DC
▪ SLU 68B	6 V
Power input	
▪ operating by 24 V DC	3 W
▪ operating by 6 V	3 W
Battery life	
▪ 4 pcs. AA alkaline batteries AA, 1,5 V, 2700 mAh	approx. 2 years (100 uses per day)
Active range	
▪ START/STOP program	0,05 - 0,15 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	15 l/min
Water inlet	male thread G 1/2"

Supply Specification

SLU 68 - Supply No. 03680 Faucet with temperature control, electronics including Bluetooth module, solenoid valve,
SLU 68B - Supply No. 03685 thermostatic valve, connecting hose, angle valve with filter and check valve (2 pcs), 230 V AC/24 V DC socket power supply (SLU 68), 4 AA alkaline batteries 1.5 V, 2700 mAh with case (SLU 68B)

Recommended Accessories

SLA 36 - Supply No. 06360 set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)
SLD 03 - Supply No. 07030 remote control for an adjustment of parameters
SANELA CONTROL APP paid Sanela Control app available for download on the App Store and Google Play