Black Ceramic Urinal with the Radar Flushing Unit SLP 89S
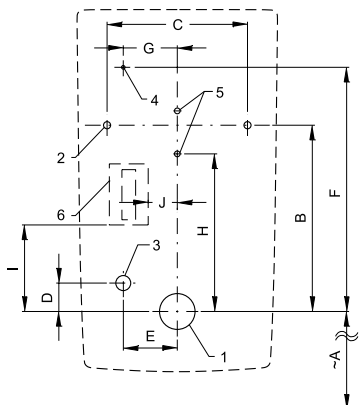
Characteristics

- **includes Bluetooth control (paid Sanela Control app available for download)**
- **economy flushing by 1 liter of water**
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or the SLD 04 remote control (acoustic indication of setting) without dismantling the urinal
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing
- black matt finish

Installation Drawing

1 - water outlet Ø 50 mm
2 - holes for fitting
3 - water supply
4 - power supply
5 - holes for wall plug
6 - power supply (SLP 89Z)

Dimensions (mm)	A	B	C	D	E	F	G	H	I	J
SLP 89 - LA FONTANA	470	270	200	40	85	370	70	255	120	65

* for the height of the front edge of the urinal 650 mm above the floor

Technical Specification

Operating voltage
- SLP 89S — 24 V DC
- SLP 89Z — 230 V AC/50 Hz
- SLP 89B — 6 V

Power input
- operating by 24 V DC — 8 W
- operating by 6 V — 3 W

Recommended flow pressure — 0,1 - 0,6 MPa
Rate of flow — 18 l/min (inf. data)
Water inlet — male thread G 1/2"
Water outlet — female thread G 1/2"

SLA 11
SLA 11A
SLA 11B
SLA 11C

Supply Specification

SLP 89S	-	Supply No. 01890	ceramic urinal with radar flush including Bluetooth module, electromagnetic valve,
SLP 89Z	-	Supply No. 01891	connecting hoses, angle valve with filter and check valve, siphon, paper drill template,
SLP 89B	-	Supply No. 01895	power supply (SLP 89Z), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 89B)

Radar Urinal Flushing Units

Recommended Accessories

SLZ 01Y - **Supply No. 05012**   power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z - **Supply No. 05011**   power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y - **Supply No. 05042**   power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z - **Supply No. 05041**   power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X - **Supply No. 10049**   power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06 - **Supply No. 05060**   power supply 24 V DC pro max. 1 pc. of flushing unit
SLD 04 - **Supply No. 07040**   remote control for an adjustment of parameters
SLA 11 - **Supply No. 06110**   deodorising urinal screen - orange colour, mango scent
SLA 11A - **Supply No. 06111**   deodorising urinal screen - red colour, kiwi and grapefruit scent
SLA 11B - **Supply No. 06112**   deodorising urinal screen - transparent colour, honeysuckle scent
SLA 11C - **Supply No. 06113**   deodorising urinal screen - blue colour, cotton bloom scent
SLR 09 - **Supply No. 08090**   mounting frame for ceramic urinals with built-in flush or for ceramic washbasins
SANELA CONTROL APP   paid Sanela Control app available for download on the App Store and Google Play

Radar Urinal Flushing Units