

Time-controlled Flushing Unit with valve SLP 01Z, SLP 01ZX



SANELA
we make water cool®




Characteristics



- includes Bluetooth control (Sanela Control app available for download)
- vandal-proof
- programmable time-controlled flushing unit for urinal troughs SLPN 02(Z) - 05(Z)
- parameters adjustment by Bluetooth application Sanela control
- the 7-day programmable time setting allows the selection of individual days or the entire week according to operational requirements
- the 24-hour daily time profile is used to define a specific time interval for activating the flush during the day
- adjustable flushing interval 00:01 - 99:59 h
- adjustable flushing time 0,5s - 15,5s
- after switch on the power supply 230 V AC, SLP 01Z starts to flush in adjusted interval
- polished finish (SLP 01Z)
- brushed finish (SLP 01ZX)

Installation Drawing

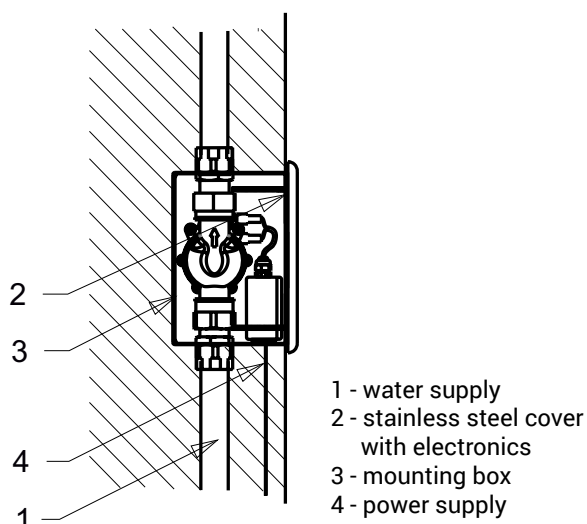

Technical Specification

Stainless steel cover dimension	170 x 170 x 10 mm
Mounting box dimension	145 x 155 x 100 mm
Operating voltage	
▪ SLP 01Z, SLP 01ZX	230 V AC/50 Hz
Recommended flow pressure	0,15 - 0,6 MPa
Rate of flow	70 l/min. by the pressure 0,15 MPa (inf. data)
Water inlet	Ø min. 32 mm (PN 16) male thread G 1"
Water outlet	male thread G 1"

Supply Specification

SLP 01Z - Supply No. 01011 stainless steel cover with electronics including Bluetooth module, stainless steel mounting
SLP 01ZX - Supply No. 11011 box with brass screw coupling, power supply, Sanela Control app available for download on the App Store and Google Play