




Characteristics

- includes Bluetooth control (paid Sanelia control app available for download)
- responds to the presence of a person in front of the urinal at a distance max 0.7 m from the sensor for longer than 7.5 s
- flushing occurs after the person leaves the detected zone
- flush time is adjustable from 0.5 to 15.5 s
- parameter settings and communication with the electronics via Sanelia control app (Bluetooth) or the SLD 03
- automatic flushing 24 hours after the last valve activation
- possibility to regulate water flow with a ball valve
- brushed finish

Building preparation

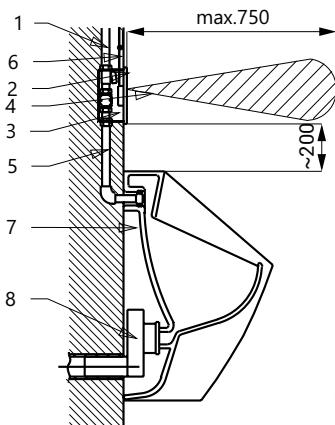

- 1 - water supply
- 2 - stainless steel cover with electronics
- 3 - mounting box
- 4 - sensing area
- 5 - connection to urinal
- 6 - power supply
- 7 - urinal
- 8 - siphon

Technical Specification

| | |
|----------------------------------|------------------------------|
| Stainless steel cover dimensions | 170 x 170 x 10 mm |
| Mounting box dimensions | 140 x 140 x 75 mm |
| Supply voltage | 24 V DC |
| Power input | 7 W |
| Range | 0,6 - 0,75 m |
| Recommended working pressure | 0,1 - 0,6 MPa |
| Flow rate | 18 l/min (informative value) |
| Water inlet | external thread G 3/4" |
| Water outlet | external thread G 3/4" |

Supply Specification

SLP 02KX - Supply No. 11020 stainless steel cover with electronics including Bluetooth module, plastic installation box with union nut, solenoid valve and ball valve

Recommended accessories

| | | |
|--------------------|--------------------|---|
| SLZ 01Y | - Supply No. 05012 | power supply 24 V DC for max. 5 flushers |
| SLZ 01Z | - Supply No. 05011 | power supply 24 V DC for max. 9 flushers |
| SLZ 04Y | - Supply No. 05042 | power supply 24 V DC for DIN rail, for max. 5 flushers |
| SLZ 04Z | - Supply No. 05041 | power supply 24 V DC for DIN rail, for max. 9 flushers |
| SLZ 04X | - Supply No. 10049 | power supply 24 V DC for DIN rail, for max. 15 flushers |
| SLZ 06 | - Supply No. 05060 | power supply 24 V DC for max. 1 flusher |
| SLD 03 | - Supply No. 07030 | remote control for an adjustment of parameters |
| SLA 02 | - Supply No. 06020 | inlet fitting with a rubber seal for water supply to urinals with rear inlet |
| SLR 02 | - Supply No. 08020 | frame for plasterboard for urinal and flush valve, which is located in the space above the urinal |
| SLR 22 | - Supply No. 08220 | frame for plasterboard structures, for anchoring to the floor and rear wall, for mounting ceramic urinals and stainless steel urinals (SLP 07, SLP 09) and for flush valves (SLP 02) with sensor located above the urinal |
| SANELA CONTROL APP | | paid Sanelia Control app available for download on the App Store and Google Play |