




Characteristics

- **vandal-proof design**
- is intended for pressurized water from the supply, cannot be used for toilets with cistern
- responds to a gentle press of the piezo button with immediate flushing
- flush duration of the flush is adjustable from 0.5 to 15.5 s, standard 8 s
- automatic flush after every eighth use and after 24 hours from the last flush
- electromagnetic valve with water flow regulation option, possibility of flushing by turning the valve coil (e.g. in case of power failure)
- parameter setting using remote control SLD 04
- brushed finish

Installation Drawing

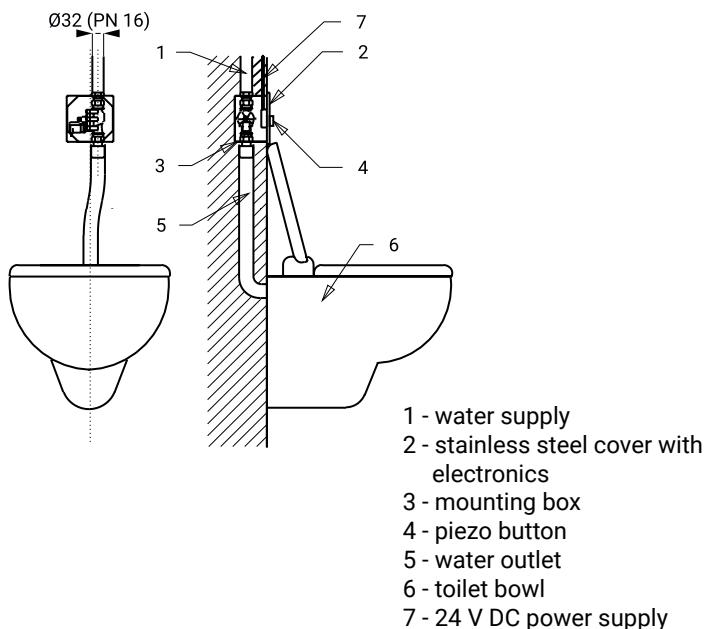

Technical Specification

Stainless steel cover dimensions	170 x 160 x 10 mm
Mounting box dimensions	145 x 155 x 100 mm
Supply voltage	24 V DC
Power input	7 W
Recommended working pressure	0.15 - 0.6 MPa
Flow rate	70 l/min at pressure 0.15 MPa (informative value)
Water inlet	cross-section min. 32 mm (PN 16)
Water outlet	external thread min. G 1" external thread min. G 1"

Supply Specification

SLW 01PX - Supply No. 14011 stainless steel cover with piezo electronics, stainless steel mounting box with screw connection and solenoid valve, outlet fitting with gasket

Recommended accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for max. 5 flushers
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for max. 9 flushers
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for max. 5 flushers
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for max. 9 flushers
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for max. 15 flushers
SLD 04	- Supply No. 07040	remote control for an adjustment of parameters
SLR 03	- Supply No. 08030	mounting frame for pre-wall installation for wall-hung WC and flush valve SLW 01xx, SLW 03PA
SLR 03A	- Supply No. 08032	mounting frame for wall-hung WC and flush valve, which is located in the space above the WC (SLW 01NK, SLW 01P, SLW 01PA, SLW 03PA, SLP 05)
SLR 07	- Supply No. 08070	mounting frame for fixing Sanela mounting boxes
SLA 04	- Supply No. 06040	plastic connection between WC flush valve and toilet