

# Automatic washbasin tap SLU 56



**SANELA**   
we make water cool®




## Characteristics



- includes Bluetooth control  
(paid Sanela control app available for download)
- economical aerator, flow rate 6 l/min
- hygienic flush
- is designed for single-pipe supply of cold or pre-mixed water
- responds to the presence of hands in the sensing zone with immediate water activation
- water shuts off after hands are removed and the set time elapses (can be set in the range 0.25 – 7.75 s)
- safety function: water shut-off after 5 minutes
- option to switch to START/STOP mode
- parameter settings and communication with the electronics via Sanela control app (Bluetooth) or the SLD 03

## Dimensions

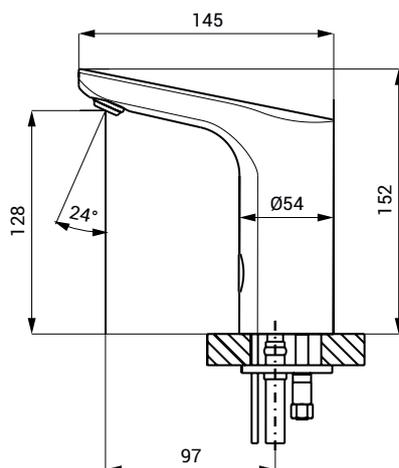

## Technical Specification

<b>Dimensions</b>	152 x 145 mm
<b>Weight</b>	1,5 kg
<b>Operating voltage</b>	24 V DC
<b>Power input</b>	7 W
<b>Range</b>	
▪ standard	0,13 - 0,19 m
▪ in START/STOP mode	0,05 - 0,15 m
<b>Recommended flow pressure</b>	0.1 - 0.6 MPa
<b>Rate of flow</b>	6 l/min. (inf. data)
<b>Water inlet</b>	external thread G 1/2"

## Supply Specification

**SLU 56 - Supply No. 03560** tap body including Bluetooth module, with electronics, solenoid valve (1 pc.), connecting hose

## Recommended accessories

<b>SLZ 01Y - Supply No. 05012</b>	power supply 24 V DC for operating of max. 5 pcs. of washbasin taps
<b>SLZ 01Z - Supply No. 05011</b>	power supply 24 V DC for operating of max. 9 pcs. of washbasin taps
<b>SLZ 04Y - Supply No. 05042</b>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of washbasin taps
<b>SLZ 04Z - Supply No. 05041</b>	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of washbasin taps
<b>SLZ 04X - Supply No. 10049</b>	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of washbasin taps
<b>SLZ 06 - Supply No. 05060</b>	power supply 24 V DC for max. 1 washbasin tap
<b>SLD 03 - Supply No. 07030</b>	remote control for an adjustment of parameters
<b>SLT 04 - Supply No. 09040</b>	thermostatic valve 3/4", flow rate 28 l/min at 0.1 MPa pressure
<b>SLT 05 - Supply No. 09050</b>	thermostatic valve 1/2", flow rate 42 l/min at 0.1 MPa pressure
<b>SLA 55A - Supply No. 06550</b>	water-saving aerator 3.8 l/min
<b>SLA 55B - Supply No. 06551</b>	water-saving aerator 1.9 l/min
<b>SANELA CONTROL APP</b>	paid Sanela control application available for download on the App Store and Google Play