

# Stainless Steel Bathroom Floor Drains SLKN 05

## Characteristics

### BATHROOM DRAIN

- length L = 1150 mm
- collar serves for a tight and reliable connection to hydro-isolation
- collar with the frame sealed up against the moisture
- mounting legs with M10 screws for better seating of the drain to the floor (horizontal position)
- 2 pcs. of waterproofing tapes for fixation to base, including screws and wall plugs
- side bends for better stability
- bond screw for connection with bonding conductor
- different lengths could be made to order (till 1200 mm - depression to the waste, over 1200 mm - decline to the waste)
- load class K3 (till 300 kg)
- material AISI-304


### WASTE OUTLET

- plastic siphon DN 50 mm
- according to the norm DIN EN 274; rate of flow 42 l/min
- possibility of adjustment of the direction and the slope of the drain to 20°
- different siphon positions could be made to order

### GRID

- design of grids A - F
- index X - brushed finish
- material stainless steel AISI - 304
- other designs could be made to order

## Grid Designs

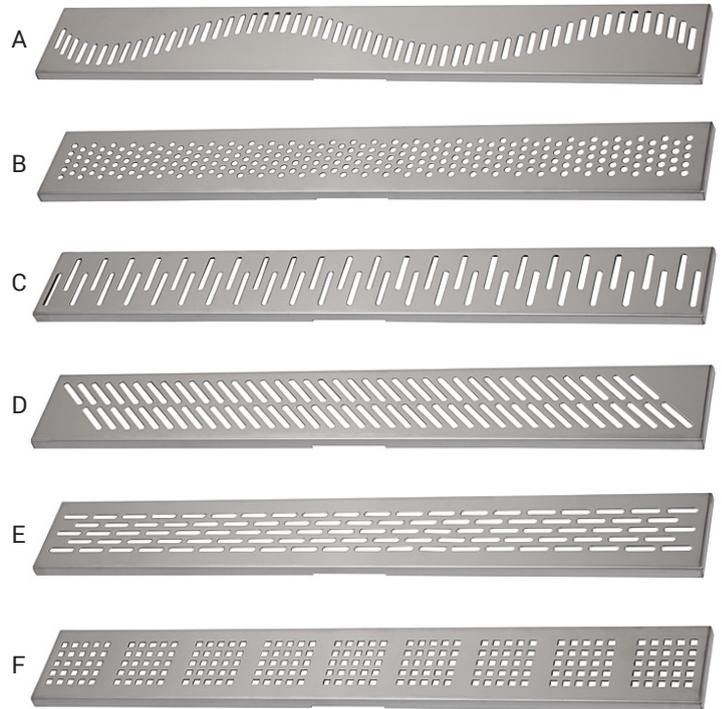

## Drains for open space



## Dimensions

