Automatic Washbasin Tap for Non-pressure Water Heaters SLU 01NH






Characteristics



- hygienic flush
- aerator without flow rate restriction
- is destined for connection to the non-pressure water heater under the washbasin
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 - 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

Installation Drawing

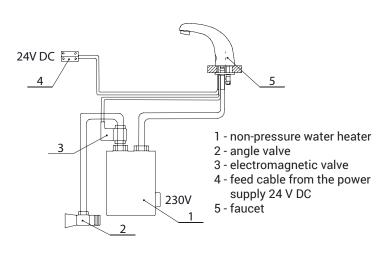

Technical Specification

Operating voltage

SLU 01NH	24 V DC
■ SLU 01NHB	6 V
Power input	
operating by 24 V DC	7 W
operating by 6 V	3 W
Rattery life	

4 pcs. AA alkaline batteries approx. 2 years
AA, 1,5 V, 2700 mAh (100 uses per day)

Active range

standard	0,13 - 0,19 m
START/STOP program	0,05 - 0,15 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	6 l/min. (inf. data)
Water inlet	male thread G 1/2
Water temperature regulation	on a water heater

Supply Specification

SLU 01NH - Supply No. 33011 SLU 01NHB - Supply No. 33012 faucet with an electronics, electromagnetic valve (1 pc.), connecting hoses, angle valve with filter and check valve (1 pc.), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLU 01NHB)

Recommended Accessories

SLZ 01Y SLZ 01Z	-	Supply No. 05012 Supply No. 05011	power supply 24 V DC for operating of max. 5 ks pcs. of washbasin taps power supply 24 V DC for operating of max. 9 ks pcs. of washbasin taps
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of washbasin taps
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of washbasin taps
SLZ 04X	-	Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of washbasin taps
SLZ 06	-	Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of washbasin tap
SLD 03	-	Supply No. 07030	remote control for an adjustment of parameters
SLA 36	-	Supply No. 06360	set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)