

Stainless Steel Piezo Washing Troughs

SLUN 50P, SLUN 51P, SLUN 52P, SLUN 53P

Characteristics




- economical aerator, rate of flow 6l/min
- hygienic flush
- vandal-proof
- suitable for medical facilities
- stainless steel floor standing washing troughs with integrated piezo electronics
- vandal-proof stainless steel spouts
- SLUN 50P, PT - length 1250 mm (2 pcs. of electronics)
- SLUN 51P, PT - length 1900 mm (3 pcs. of electronics)
- SLUN 52P, PT - length 2500 mm (4 pcs. of electronics)
- SLUN 53P, PT - length 3000 mm (5 pcs. of electronics)
- water flows after soft push of the piezo button
- water stops flowing after adjustable flowing time (can be set in 2 - 62 s), standard 10 s
- water could be stopped by follow-up soft push of piezo button
- parameter adjustment using by the remote control SLD 04
- temperature is regulated by angle valves (for models with index P) or by thermostatic valve (for models with index PT)
- different lengths could be made to order
- material AISI - 304
- could be made to order from stainless steel AISI - 316L
- brushed finish



SLUN 50P

Dimensions

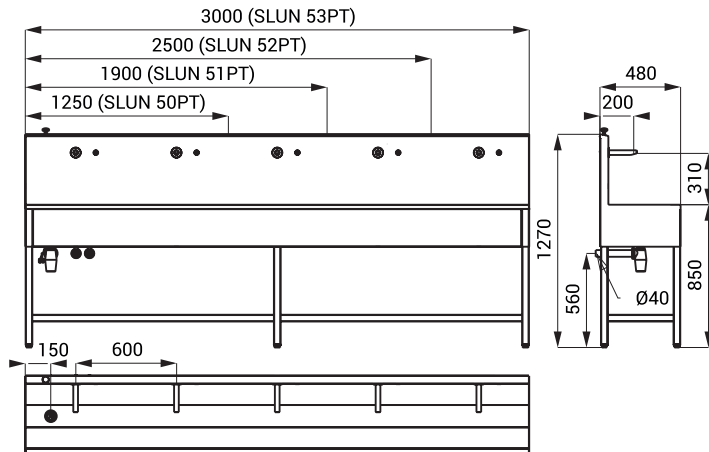

Technical Specification

Operating voltage	24 V DC
Power input	
▪ SLUN 50P, PT	14 W
▪ SLUN 51P, PT	20 W
▪ SLUN 52P, PT	27 W
▪ SLUN 53P, PT	33 W
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	6 l/min. (inf. data)
Water inlet	male thread G 1/2"

Supply Specification

SLUN 50P - Supply No. 93506	stainless steel washing trough with piezo electronics and spouts, electromagnetic valve
SLUN 51P - Supply No. 93515	(pcs. according to number of electronics), connecting hoses, angle valve with filter
SLUN 52P - Supply No. 93524	(2 pcs.), siphon, thermostatic valve (for models with index PT)
SLUN 53P - Supply No. 93534	
SLUN 50PT - Supply No. 93504	
SLUN 51PT - Supply No. 93514	
SLUN 52PT - Supply No. 93525	
SLUN 53PT - Supply No. 93535	

Recommended Accessories

SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 4 pcs. of spouts
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 8 pcs. of spouts
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of spouts
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 8 pcs. of spouts
SLZ 04X	-	Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 14 pcs. of spouts
SLD 04	-	Supply No. 07040	remote control for an adjustment of parameters
SLA 56A	-	Supply No. 06560	economical aerator 3,8 l/min
SLA 56B	-	Supply No. 06561	economical aerator 1,9 l/min