


Stainless Steel Piezo Washing Troughs

SLUN 80P, SLUN 81P, SLUN 82P, SLUN 83P

Characteristics




- economical aerator, rate of flow 6 l/min
- hygienic flush
- vandal-proof
- suitable for medical facilities
- stainless steel wall hung washing troughs with integrated piezo electronics
- vandal-proof stainless steel spouts
- SLUN 80P, PT - length 1250 mm (2 pcs. of electronics)
- SLUN 81P, PT - length 1900 mm (3 pcs. of electronics, 1 pc. of bracket)
- SLUN 82P, PT - length 2500 mm (4 pcs. of electronics, 2 pcs. of brackets)
- SLUN 83P, PT - length 3000 mm (5 pcs. of electronics, 2 pcs. of brackets)
- water flows after soft push of the piezo button
- water stops flowing after adjustable flowing time (can be set in 2 - 62 s), standard 10 s
- water could be stopped by follow-up soft push of piezo button
- parameter adjustment using by the remote control SLD 04
- temperature is regulated by angle valves (for models with index P) or by thermostatic valve (for models with index PT)
- different lengths could be made to order
- material AISI - 304
- could be made to order from stainless steel AISI - 316L
- brushed finish

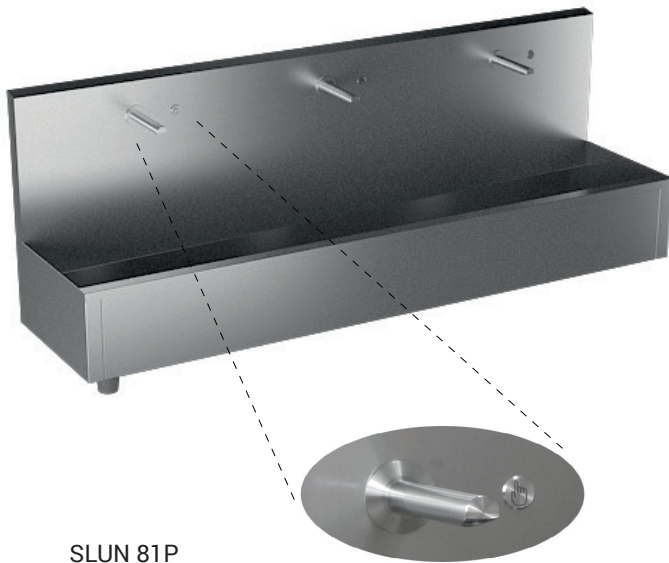

SLUN 81P

Dimensions

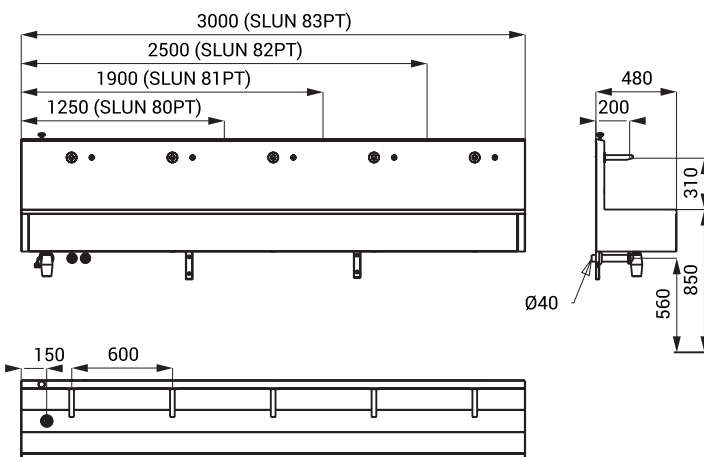

Technical Specification

Operating voltage	24 V DC
Power input	
▪ SLUN 80P, PT	14 W
▪ SLUN 81P, PT	20 W
▪ SLUN 82P, PT	27 W
▪ SLUN 83P, PT	33 W
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	6 l/min. (inf. data)
Water inlet	male thread G 1/2"

Supply Specification

SLUN 80P	- Supply No. 93804	stainless steel washing trough with piezo electronics and spouts, electromagnetic valve (pcs. according to number of electronics), connecting hoses, angle valve
SLUN 81P	- Supply No. 93814	with filter (2 pcs.), siphon, thermostatic valve (for models with index PT), mounting set, supportive stainless steel bracket (pcs. according to trough length)
SLUN 82P	- Supply No. 93824	
SLUN 83P	- Supply No. 93834	
SLUN 80PT	- Supply No. 93805	
SLUN 81PT	- Supply No. 93815	
SLUN 82PT	- Supply No. 93825	
SLUN 83PT	- Supply No. 93835	

Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 4 pcs. of spouts
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 8 pcs. of spouts
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of spouts
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 8 pcs. of spouts
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 14 pcs. of spouts
SLD 04	- Supply No. 07040	remote control for an adjustment of parameters
SLA 56A	- Supply No. 06560	economical aerator 3,8 l/min
SLA 56B	- Supply No. 06561	economical aerator 1,9 l/min