


Set for Mounting to the Wall for SLU 39(X), SLU 39PX SLA 52A, SLA 52B

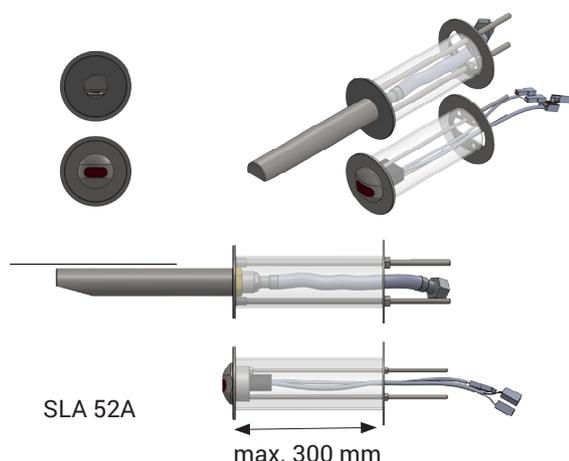

Characteristics


- is destined for wall installation of automatic stainless steel washbasin taps (SLU 39, SLU 39X)
- rear assembling of sensor head with electronics by screws M4
- rear assembling of spout by screws M6
- during installation it is necessary to fasten the pipe (Htem DN 50) to reinforce the hole in the wall

Technical Specification

Depth of the wall max. 300 mm

Supply Specification

SLA 52A - Supply No. 06520 screw M4 (2 pcs.), screw M6 (2 pcs.), nut M4 (3 pcs.), nut M6 (2 pcs.), supporting pad (2 pcs.), pad for sensor head (1 pc.), hose

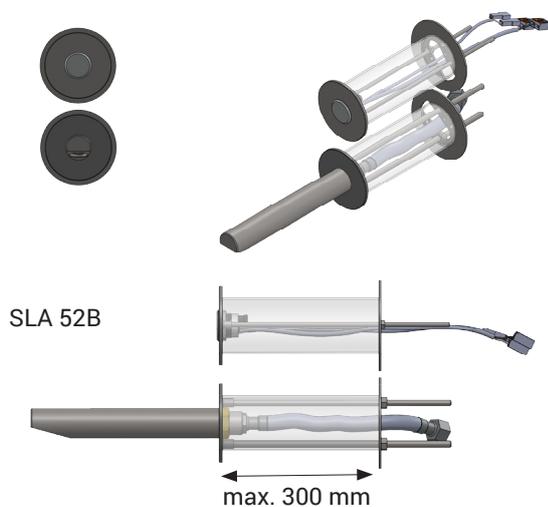

Characteristics

- is destined for wall installation of piezo stainless steel washbasin taps (SLU 39PX)
- rear assembling of piezo button by screws M4
- rear assembling of spout by screws M6
- during installation it is necessary to fasten the pipe (Htem DN 50) to reinforce the hole in the wall

Technical Specification

Depth of the wall max. 300 mm

Supply Specification

SLA 52B - Supply No. 06521 screw M4 (2 pcs.), screw M6 (2 pcs.), nut M4 (2 pcs.), nut M6 (2 pcs.), supporting pad (2 pcs.), hose