
Mounting Frames for Urinals SLR 01, 01L, 02, 02D and 02N





Dimensions



Characteristics

SLR 01

- is destined for plasterboard constructions
- is destined for urinals with mounting box behind the urinal (SLP 12, SLP 24, SLP 25, SLP 32, SLP 37)
- possibility to use it for distances between axes of CW 420 to 600 mm
- surface finishing yellow zinc-chromat
- mounting to CW profiles by screws with classic nuts
- mounting screws M10 and waste pipe holder Ø 50 mm


Supply Specification

SLR 01 - Supply No. 08010

mounting frame for plasterboard construction for urinal and flushing unit with mounting box behind the urinal, mounting screws M10



Dimensions



Characteristics

SLR 01L

- is destined for plasterboard constructions
- is destined for urinals with radar flushing unit on the mounting rail (SLP 07, SLP 19, SLP 23, SLP 31, SLP 36, SLP 49, SLP 54, SLP 59, SLP 68, SLP 69, SLP 70, SLP 71)
- possibility to use it for distances between axes of CW 420 to 600 mm
- surface finishing yellow zinc-chromat
- mounting to CW profiles by screws with classic nuts
- mounting screws M10 and waste pipe holder Ø 50 mm

Supply Specification

SLR 01L - Supply No. 08015

mounting frame for plasterboard construction for urinal with radar flushing unit on the mounting rail, mounting screws M10



SLR 02




Characteristics

SLR 02

- is destined for plasterboard constructions
- is destined for urinal and infra-red flushing unit, which is placed above the urinal (SLP 02, SLP 06)
- possibility to use it for distances between axes of CW 420 to 600 mm
- surface finishing yellow zinc-chromat
- mounting to CW profiles by screws with classic nuts
- mounting screws M10 and waste pipe holder Ø 50 mm

Dimensions



Supply Specification

SLR 02 - Supply No. 08020

mounting frame for plasterboard construction for urinal with flushing unit, which is placed above the urinal, mounting screws M10




Characteristics

SLR 02D

- is destined for plasterboard constructions
- is destined for urinal with infra-red flushing unit (SLP 17)
- possibility to use it for distances between axes of CW 420 to 600 mm
- surface finishing yellow zinc-chromat
 mounting to CW profiles by screws with classics
- mounting screws M8, waste pipe holder Ø 50 mm and watter inlet holder Ø 32 mm

Dimensions



Supply Specification

SLR 02D -**Supply No. 08024** mounting frame for plasterboard construction for urinal DOMINO, mounting screws M8




Characteristics

SLR 02N

- is destined for plasterboard constructions
- is destined for stainless steel urinals (SLPN 07, SLPN 09)
- possibility to use it for distances between axes of CW 420 to 600 mm
- surface finishing yellow zinc-chromat
 mounting to CW profiles by screws with classic
- mounting screws M6, waste pipe holder Ø 50 mm and watter inlet holder Ø 32 mm

Dimensions

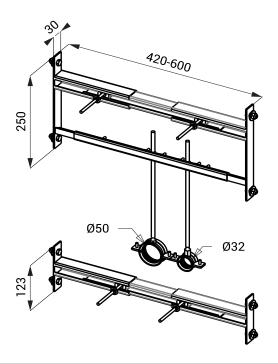

Supply Specification

Supply No. 08021 SLR 02N -

mounting frame for plasterboard construction for stainless steel urinals, mounting screws M6