

# Vandal-proof Combination Unit SLWN 28P





## Characteristics



- **vandal-proof**
- **suitable for prison**
- floor standing piezo combination with toilet, washbasin and washbasin spout
- piezo button for washbasin spout
- piezo button for toilet flushing
- filled with expanded polyurethane (to avoid dents and typical metal noise)
- **rear assembling by screws (M10, length 190 mm) from the service room**
- water flows (or flushing the toilet) after soft push of the piezo button
- water stops flowing after adjustable flowing time (by washbasin can be set in 2 - 62 s, standard 10 s and by toilet can be set in 0,5 - 15,5 s, standard 8 s)
- water could be stopped by follow-up soft push of piezo button
- automatic hygiene flush after each eight flush or 24 hours non using of toilet
- parameters adjustment by remote control SLD 04
- material stainless steel AISI 304 (1.4301)
- brushed finish

## Dimensions

SLWN 28P

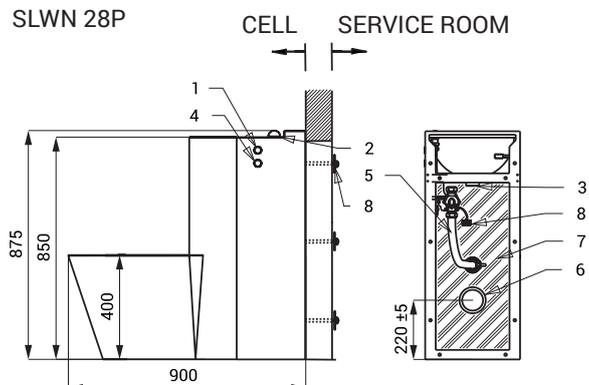

## Technical Specification

<b>Dimensions</b>	875 x 900 x 360 mm
<b>Weight</b>	24 kg
<b>Operating voltage</b>	24 V DC
<b>Power input</b>	14 W
<b>Recommended flow pressure</b>	0,15 - 0,6 MPa
<b>Rate of flow</b>	70 l/min. by the pressure 0,15 MPa (inf. data)
<b>Water inlet</b>	
▪ WC	Ø min. 32 mm (PN 16) male thread G 3/4"
▪ washbasin	female thread G 1/2"

- 1 - piezo button for washbasin spout
- 2 - washbasin spout - female thread G 1/2"
- 3 - waste outlet pipe from the washbasin - male thread G 6/4"
- 4 - piezo button for toilet flushing
- 5 - toilet flushing valve - male thread G 3/4"
- 6 - waste outlet connection from toilet (Ø 101,6 mm)
- 7 - filled with expanded polyurethane
- 8 - M10 screw (length 190 mm) + anchor + nut (6 pcs.)
- 9 - power supply 24 V DC

## Supply Specification

**SLWN 28P - Supply No. 94283** stainless steel combination unit with toilet and washbasin, piezo electronics (2 pcs.), washbasin spout, screws M6 (6 pcs.)

## Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for max. 2 pcs. of combination units
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for max. 4 pcs. of combination units
SLZ 04Y	- Supply No. 05042	power supply 24 V DC on DIN rail, for max. 2 pcs. of combination units
SLZ 04Z	- Supply No. 05041	power supply 24 V DC on DIN rail, for max. 4 pcs. of combination units
SLZ 04X	- Supply No. 10049	power supply 24 V DC on DIN rail, for max. 7 pcs. of combination units
SLD 04	- Supply No. 07040	remote control for an adjustment of parameters