

Stainless Steel Token Shower Panels

SLZA 28, SLZA 29, SLZA 29T



SLZA 28



SLZA 29





SLZA 29T

Characteristics



- **hygienic flush**
- stainless steel token wall hung shower panels
- SLZA 28 is destined for cold or premixed water
- SLZA 29 is destined for cold and hot water, temperature is regulated by mixer
- SLZA 29T is destined for cold and hot water, temperature is regulated by thermostatic mixer
- safety fuse against scalding (SLZA 29T)
- after inserting a token SLZA 52 in to the panel, system reacts on the push of the mechanical button by immediate water flow
- system reacts on the push of the button by immediate water flow and 10 red diods light on, gradual lighting off count down the shower time
- the user can start and stop the water directly in the shower
- 30 % of the time paid before the end of the water supply, the user is notified by interruption of the water flow
- parameters adjustment using by the remote control SLD 04
- material AISI - 304
- brushed finish

Dimensions

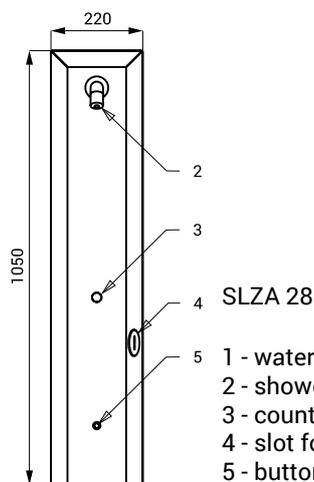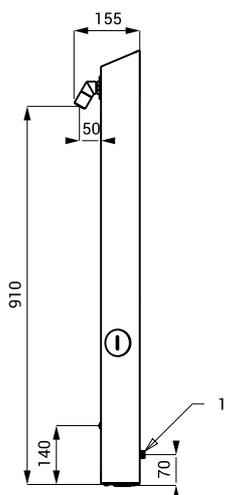

SLZA 28

- 1 - water supply (male thread G 1/2")
- 2 - shower head
- 3 - countdown time indication
- 4 - slot for insertion of token
- 5 - button START/STOP

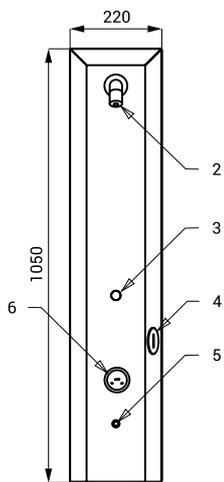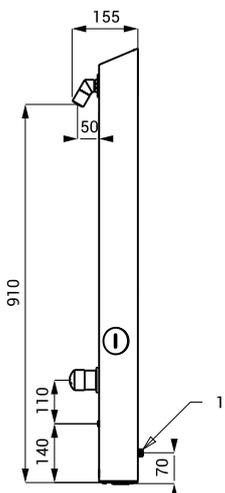

SLZA 29

- 1 - water supply (male thread G 1/2")
- 2 - shower head
- 3 - countdown time indication
- 4 - slot for insertion of token
- 5 - button START/STOP
- 6 - mixer

Technical Specification

Operating voltage

- SLZA 28, SLZA 29, SLZA 29T 24 V DC

Power input

- operating by 24 V DC 7 W

Recommended flow pressure

- 0,1 - 0,6 MPa


Rate of flow

- 9 l/min.

(inf. data)

Water inlet

- male thread G 1/2"

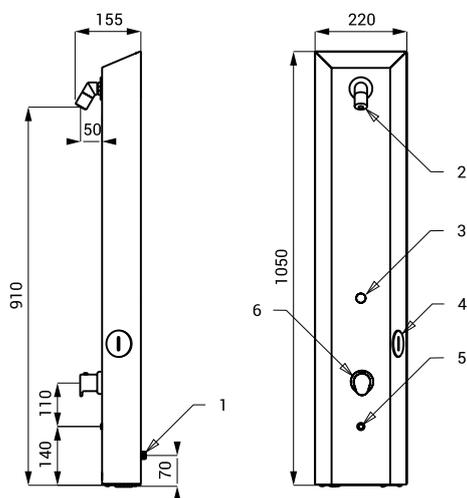

SLZA 29T

- 1 - water supply (male thread G 1/2")
- 2 - shower head
- 3 - countdown time indication
- 4 - slot for insertion of token
- 5 - button START/STOP
- 6 - thermostatic mixer

Supply Specification

- SLZA 28 - **Supply No. 89286** stainless steel shower panel with electronics, shower head with a possibility to set an angle of water flow, electromagnetic valve (1 pc.), connecting hoses, angle valve with filter (1 pc.)
- SLZA 29 - **Supply No. 89290** stainless steel shower panel with electronics, shower head with a possibility to set an angle of water flow, electromagnetic valve (1 pc.), mixer, connecting hoses, angle valve with filter and check valve (2 pcs.)
- SLZA 29T - **Supply No. 89291** stainless steel shower panel with electronics, shower head with a possibility to set an angle of water flow, electromagnetic valve (1 pc.), thermostatic mixer, connecting hoses, angle valve with filter and check valve (2 pcs.)

Recommended Accessories

- SLZA 52 - **Supply No. 88520** set of 50 pcs. of plastic tokens
- SLZ 01Y - **Supply No. 05012** power supply 24 V DC for operating of max. 5 pcs. of showers
- SLZ 01Z - **Supply No. 05011** power supply 24 V DC for operating of max. 9 pcs. of showers
- SLZ 04Y - **Supply No. 05042** power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
- SLZ 04Z - **Supply No. 05041** power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
- SLZ 04X - **Supply No. 10049** power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
- SLZ 06 - **Supply No. 05060** power supply 24 V DC pro max. 1 pc. of shower
- SLD 04 - **Supply No. 07040** remote control for an adjustment of parameters
- SLT 04 - **Supply No. 09040** thermostatic valve 3/4", rate of flow 28 l/min by the pressure 0,1 MPa
- SLT 05 - **Supply No. 09050** thermostatic valve 1/2", rate of flow 42 l/min by the pressure 0,1 MPa