


Time-controlled Flushing Unit SLP 01Z




Characteristics

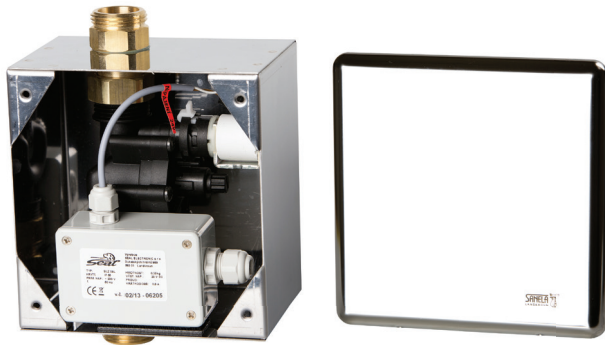

- **vandal-proof**
- time-controlled flushing unit for urinal troughs
SLPN 02(Z) - 05(Z)
- adjustable flushing time 0,5 - 15,5 s, standard 5 s
- parameters adjustment by remote control SLD 04
- adjustable flushing interval 10 min - 3 days, standard 1 h
- after switch on the power supply 230 V AC, SLP 01Z starts to flush in adjusted interval

Installation Drawing

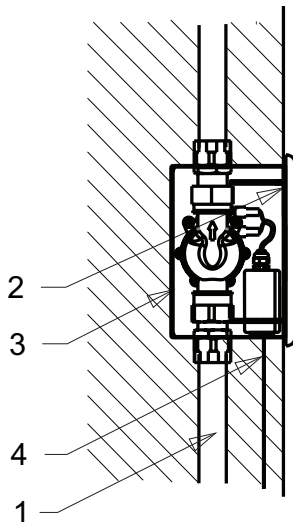

- 1 - water supply
- 2 - stainless steel cover with electronics
- 3 - mounting box
- 4 - power supply

Technical Specification

Stainless steel cover dimension	170 x 170 x 10 mm
Mounting box dimension	145 x 155 x 100 mm
Operating voltage	
▪ SLP 01Z	230 V AC/50 Hz
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	40 l/min (inf. data)
Water inlet	male thread G 1"
Water outlet	male thread G 1"

Supply Specification

SLP 01Z - Supply No. 01011

stainless steel cover with electronics, stainless steel mounting box with brass screw coupling, power supply, remote control SLD 04