

Ceramic Urinals with the Radar Flushing Unit SLP 24R, SLP 25R



SLP 24 - ALESSI
WITH A COVER




SLP 25 - ALESSI
WITHOUT A COVER

Characteristics

- easy installation
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing

Installation Drawing

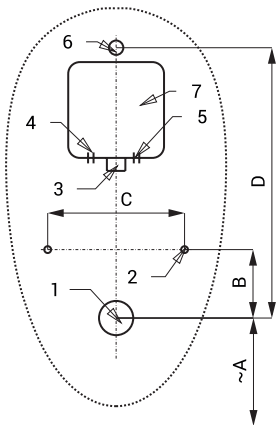

- 1 - water outlet Ø 50 mm
2 - holes for fitting
3 - water supply
4 - power supply 230 V AC (SLP 24/25RZ)
5 - power supply 24 V DC (SLP 24/25R)
6 - inlet fitting
7 - mounting box

SLP 24, 25

Dimensions (mm)	A	B	C	D
SLP 24 - ALESSI	420	100	200	395
SLP 25 - ALESSI	420	100	200	395

* for the height of the front edge of the urinal 650 mm above floor

Supply Specification

- SLP 24R - Supply No. 01244 ceramic urinal with radar flushing unit, plastic mounting box with brass screw coupling, electromagnetic valve and ball valve, inlet fitting with a rubber sealing, mounting set, siphon, plastic cover (SLP 24xx), power supply (only for models with index RZ)
- SLP 25R - Supply No. 01254
- SLP 24RZ - Supply No. 01245
- SLP 25RZ - Supply No. 01255

Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 5 pcs. of flushing units
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units
- SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
- SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
- SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
- SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit
- SLD 04 - Supply No. 07040 remote control for an adjustment of parameters
- SLA 11 - Supply No. 06110 deodorising urinal screen - orange, mango scent
- SLA 11A - Supply No. 06111 deodorising urinal screen - red, kiwi and grapefruit scent
- SLA 11B - Supply No. 06112 deodorising urinal screen - transparent, honeysuckle scent
- SLA 11C - Supply No. 06113 deodorising urinal screen - blue, cotton bloom scent
- SLR 01 - Supply No. 08010 mounting frame to the plasterboard for the urinal with radar flushing unit on the mounting rail

Technical Specification

- Dimension of mounting box** 140 x 140 x 75 mm
- Operating voltage**
- SLP 24R, 25R 24 V DC
 - SLP 24RZ, 25RZ 230 V AC/50 Hz
- Power input**
- operating by 24 V DC 8 W
- Recommended flow pressure** 0,1 - 0,6 MPa
- Rate of flow** 18 l/min (inf. data)
- Water inlet** male thread G 3/4"
- Water outlet** inlet fitting with a rubber sealing

