

# Radar Flushing Unit for Urinal Architectura SLP 68RS




## Characteristics



- radar flushing unit for urinal Architectura (Villeroy & Boch) No. 557400
- economy flushing by 1 liter of water
- during installation is necessary to blind additional inlet holes by silicone plugs (see the mounting instructions)
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the ball valve
- radar flushing unit recharges a water to the siphon after each flushing

## Installation Drawing

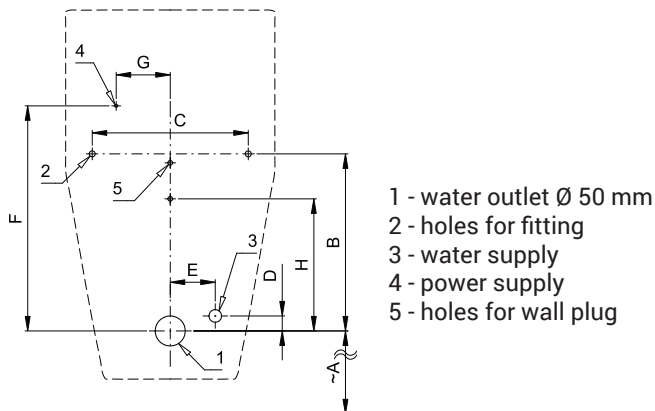

Dimensions (mm)	A	B	C	D	E	F	G	H
SLP 68 - ARCHITECTURA	390	295	260	25	75	375	90	220

\* for the height of the front edge of the urinal 650 mm above the floor

## Supply Specification

SLP 68RS - Supply No. 11685  
SLP 68RZ - Supply No. 01685  
SLP 68RB - Supply No. 11687

radar flushing unit on the mounting rail, electromagnetic valve, silicone plug (2 pcs.), connecting hoses, angle valve with filter and check valve, inlet fitting with a rubber sealing, siphon, paper drill template, power supply (SLP 68RZ), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 68RB)

## Technical Specification

### Operating voltage

- SLP 68RS 24 V DC
- SLP 68RZ 230 V AC/50 Hz
- SLP 68RB 6 V

### Power input

- operating by 24 V DC 8 W
- operating by 6 V 3 W

### Recommended flow pressure

0,1 - 0,6 MPa

### Rate of flow

18 l/min (inf. data)

### Water inlet

male thread G 1/2"

### Water outlet

inlet fitting with a rubber sealing

Illustrative photo:



## Recommended Accessories

SLZ 01Y - Supply No. 05012  
SLZ 01Z - Supply No. 05011  
SLZ 04Y - Supply No. 05042  
SLZ 04Z - Supply No. 05041  
SLZ 04X - Supply No. 10049  
SLZ 06 - Supply No. 05060  
SLD 04 - Supply No. 07040  
SLA 11 - Supply No. 06110  
SLA 11A - Supply No. 06111  
SLA 11B - Supply No. 06112  
SLA 11C - Supply No. 06113  
SLR 01L - Supply No. 08015  
  
SLA 36 - Supply No. 06360

power supply 24 V DC for operating of max. 5 pcs. of flushing units  
power supply 24 V DC for operating of max. 9 pcs. of flushing units  
power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units  
power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units  
power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units  
power supply 24 V DC for operating of max. 1 pc. of flushing unit  
remote control for an adjustment of parameters  
deodorising urinal screen - orange colour, mango scent  
deodorising urinal screen - red colour, kiwi and grapefruit scent  
deodorising urinal screen - transparent colour, honeysuckle scent  
deodorising urinal screen - blue colour, cotton bloom scent  
mounting frame to the plasterboard for the urinal with radar flushing unit on the mounting rail  
set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)