# Stainless Steel Automatic Urinal Mangers SLPN 02E, SLPN 03E, SLPN 04E, SLPN 05E







## **Characteristics:**






- stainless steel wall hung urinal mangers with integrated automatic flushing units
- mangers are delivered in the lengths 600, 1200, 1800 and 2400 mm
- different number of flushing units according to the each model
- every flushing unit reacts independently to the user attendance in front of the urinal at a maximum distance of 0,7 m, minimum stay time in active range is 7,5 sec.
- water flows after leaving active range
- adjustable flushing time from 0,5 to 15,5 seconds
- parameters adjustment by SLD 03 remote control
- automatic hygiene flushing after 24 hours non-use
- different lenghts could be made to order
- material CrNi 18/10 (AISI-304)
- brushed finish

#### **Technical Specification:**

Operating voltage 24V DC external 10 W Power input Active range 0.3 - 0.7 mRecommended flow pressure 0,1 - 0,6 MPa Rate of flow 12 l/min. (inf. data) Water inlet male thread G 1/2" Stainless steel thickness 1.5 mm

## **Dimensions:**

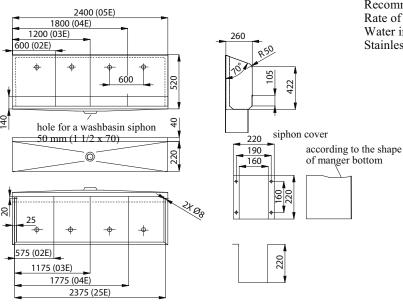

#### **Supply Specification:**

SLPN 02E - supply No. 91021 stainless steel urinal manger 600 mm with 1 automatic flushing unit; electromagnetic valve (1 pc.); angle valve (1 pc.); mounting set; cover for siphon; siphon

SLPN 03E - supply No. 91031 stainless steel urinal manger 1200 mm with 2 automatic flushing units; electromagnetic valve (2 pcs.); angle valve (1 pc.); mounting set; cover for siphon; siphon

SLPN 04E - supply No. 91041 stainless steel urinal manger 1800 mm with 3 automatic flushing units; electromagnetic valve (3 pcs.); angle valve (1 pc.); mounting set; cover for siphon; siphon

SLPN 05E - supply No. 91051 stainless steel urinal manger 2400 mm with 4 automatic flushing units; electromagnetic valve (4 pcs.); angle valve (1 pc.); mounting set; cover for siphon; siphon

#### **Recommended Accessories:**

SLZ 01Y - supply No. 05012 external power supply 230/24V DC for operating of max. 5 pcs. of electromagnetic valves (see page 118)

SLZ 01Z - supply No. 05011 external power supply 230/24V DC for operating of max. 9 pcs. of electromagnetic valves (see page 118)

**SLD 03** - supply No. 07030 universal remote control for an adjustment of parameters of all products with infra-red electronics (see page 115)