Stainless Steel Floor-Standing Urinal Mangers SLPN 02Z, SLPN 03Z, SLPN 04Z, SLPN 05Z





Characteristics:






- vandal-proof
- stainless steel floor-standing (built-in) urinal mangers
- mangers are delivered in the lengths 600, 1200, 1800 and 2400 mm
- pipe flushing in the upper part of the manger
- ruff around the bottom part for connection to hydro-isolation
- removable cover of flushing pipe (4 nuts on the edges of the manger)
- different lenghts could be made to order
- material CrNi 18/10 (AISI-304)
- brushed finish

Technical Specification:

Recommended flow pressure Rate of flow Water inlet Stainless steel thickness 0,1 - 0,6 MPa 12 l/min. (inf. data) male thread G 1/2" 1,5 mm

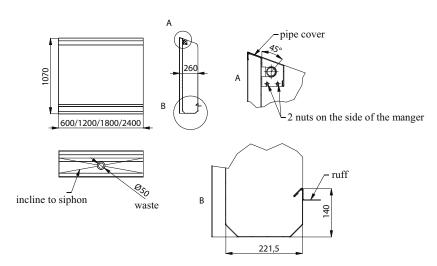

Supply Specification:

Dimensions:

SLPN 02Z - supply No. 91026 stainless steel urinal manger 600 mm; flushing pipe; mounting set; siphon

SLPN 03Z - supply No. 91036 stainless steel urinal manger 1200 mm; flushing pipe; mounting set; siphon

SLPN 04Z - supply No. 91046 stainless steel urinal manger 1800 mm; flushing pipe; mounting set; siphon

SLPN 05Z - supply No. 91056 stainless steel urinal manger 2400 mm; flushing pipe; mounting set; siphon

Recommended Accessories:

SLD 04 - supply No. 07040 universal remote control for an adjustment of parameters (see page 115)

SLP 01Z - **supply No. 01011** time-controlled flushing unit (see page 43)



SLP 01Z