

Stainless Steel Urinals with Hidden Flushing Unit SLPN 09C




SLPN 09C

Characteristics



- vandal-proof
- suitable for a prison
- stainless steel wall hung urinal with integrated electronics
- rear assembling through the service hatch and screws
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04
- automatic hygiene flushing after 24 hours non-use
- monitoring of battery capacity (for models with index B)
- material AISI - 304
- brushed finish

Dimensions

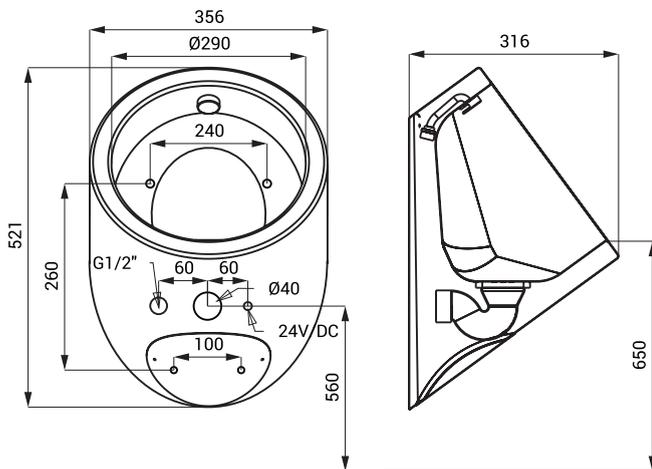

* for the height of the front edge of the urinal 650 mm above the floor

Technical Specification

Operating voltage

- SLPN 09C 24 V DC
- SLPN 09CZ 230 V AC/ 50 Hz
- SLPN 09CB 6 V

Power input

- operating by 24 V DC 7 W
- operating by 6 V 3 W

Battery life

- 4 pcs. AA alkaline batteries approx. 2 years (100 uses per day)

Recommended flow pressure

- 0,1 - 0,6 MPa

Rate of flow

Water inlet

- 12 l/min. (inf. data)
- male thread G 1/2"

Supply Specification

- SLPN 09C - Supply No. 91093** stainless steel urinal with flushing head, electronics, electromagnetic valve (1 pc.),
SLPN 09CZ - Supply No. 91095 angle valve with a filter, connecting hoses, mounting set, siphon, 4 pc. AA alkaline
SLPN 09CB - Supply No. 91094 batteries 1,5 V, 2700 mAh (SLPN 09CB), power supply (SLPN 09CZ)

Recommended Accessories

- SLZ 01Y - Supply No. 05012** power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y - Supply No. 05042 power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z - Supply No. 05041 power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X - Supply No. 10049 power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 04 - Supply No. 07040 remote control for an adjustment of parameters
SLR 02N - Supply No. 08021 mounting frame for plasterboard construction for stainless steel urinals
SLA 36 - Supply No. 06360 set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)