

# Piezo Shower Control SLS 01PA




## Characteristics



- hygienic flush
- vandal-proof
- suitable for a prison
- special vandal-proof stainless steel cover, thickness 3 mm, safety screws
- is destined for cold or premixed water
- water flows after soft push of the piezo button
- water stops flowing after adjustable flowing time (can be set in 10 s - 310 s), standard 120 s
- water could be stopped by follow-up soft push of piezo button
- parameter adjustment using by the remote control SLD 04

## Installation Drawing

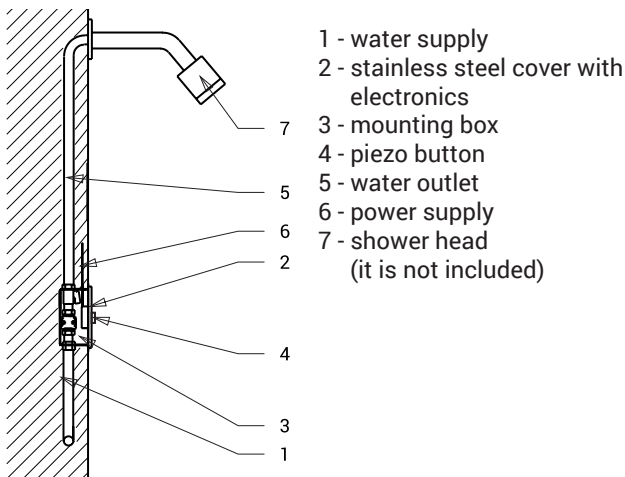

## Technical Specification

<b>Stainless steel cover dimension</b>	170 x 170 x 10 mm
<b>Mounting box dimension</b>	140 x 140 x 75 mm
<b>Operating voltage</b>	
▪ SLS 01PA	24 V DC
<b>Power input</b>	
▪ operating by 24 V DC	7 W
<b>Recommended flow pressure</b>	0,1 - 0,6 MPa
<b>Rate of flow</b>	12 l/min. (inf. data)
<b>Water inlet</b>	male thread G 3/4"
<b>Water outlet</b>	male thread G 3/4"

## Supply Specification

**SLS 01PA - Supply No. 12016** stainless steel cover with electronics, plastic mounting box with brass screw coupling, electromagnetic valve and ball valve, 4x torx screw

## Recommended Accessories

<b>SLZ 01Y</b>	- Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
<b>SLZ 01Z</b>	- Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
<b>SLZ 04Y</b>	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
<b>SLZ 04Z</b>	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
<b>SLZ 04X</b>	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
<b>SLZ 06</b>	- Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of shower
<b>SLD 04</b>	- Supply No. 07040	remote control for an adjustment of parameters
<b>SLT 04</b>	- Supply No. 09040	thermostatic valve 3/4", rate of flow 28 l/min by the pressure 0,1 MPa
<b>SLT 05</b>	- Supply No. 09050	thermostatic valve 1/2", rate of flow 42 l/min by the pressure 0,1 MPa
<b>SLT 07</b>	- Supply No. 09070	thermostatic valve 3/4", rate of flow 43 l/min by the pressure 0,1 MPa
<b>SLT 08</b>	- Supply No. 09080	thermostatic valve 1", rate of flow 53 l/min by the pressure 0,1 MPa
<b>SLT 09</b>	- Supply No. 09090	thermostatic valve 5/4", rate of flow 82 l/min by the pressure 0,1 MPa
<b>SLT 10</b>	- Supply No. 09100	thermostatic valve 6/4", rate of flow 155 l/min by the pressure 0,1 MPa
<b>SLA 03</b>	- Supply No. 06030	vandal-proof shower head with possibility to set an angle of water flow
<b>SLA 13</b>	- Supply No. 06130	vandal-proof shower head with possibility to set an angle of water flow
<b>SLA 14</b>	- Supply No. 06140	vandal-proof shower head
<b>SLA 28</b>	- Supply No. 06280	shower head
<b>SLA 39</b>	- Supply No. 06390	vandal-proof shower head
<b>SLA 40</b>	- Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow