

Automatic Shower Control SLS 02




SLS 02

Characteristics

- **hygienic flush**
- is destined for cold and hot water, temperature is regulated by mixer
- water is flowing as long as an user is in the active range
- water stops flowing after the user leaves the active range sensor after adjustable time delay (can be set in range 0,25 - 7,75 s), standard 3 s
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

Installation Drawing

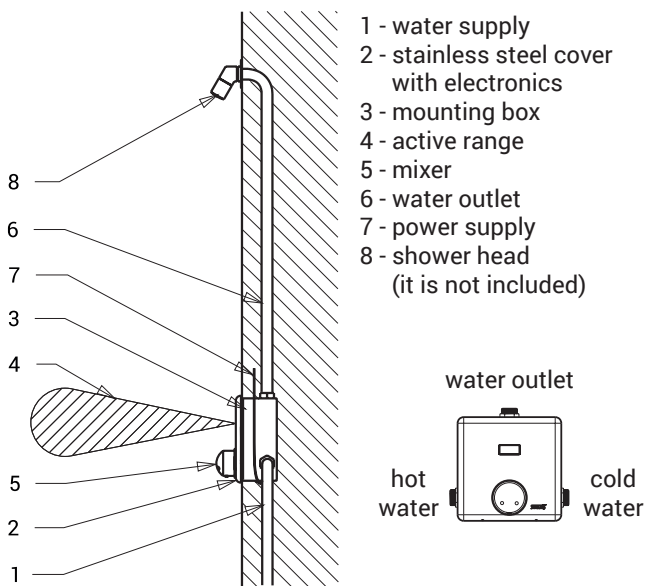

Technical Specification

| | |
|-------------------------------------------------------|---------------------------------------|
| Stainless steel cover dimension | 170 x 170 x 10 mm |
| Mounting box dimension | 150 x 160 x 65 mm |
| Operating voltage | |
| ▪ SLS 02 | 24 V DC |
| ▪ SLS 02B | 6 V |
| Power input | |
| ▪ by operating 24 V DC | 7 W |
| ▪ by operating 6 V | 3 W |
| Battery life | |
| ▪ 4 pcs. AA alkaline batteries AA, 1,5 V, 2700 mAh | approx. 2 years (100 uses per day) |
| Active range | |
| ▪ standard | 0,27 - 0,35 m |
| ▪ START/STOP program | 0,05 - 0,15 m |
| Recommended flow pressure | 0,1 - 0,6 MPa |
| Rate of flow | 12 l/min. (inf. data) |
| Water inlet | male thread G 3/4" |
| Water outlet | male thread G 3/4" |

Supply Specification

| | | |
|----------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SLS 02 | - Supply No. 02020 | stainless steel cover with electronics, stainless steel mounting box with brass screw coupling, electromagnetic valve, ball valve and mixer, 4 pcs. AA alkaline batteries |
| SLS 02B | - Supply No. 02026 | 1,5 V, 2700 mAh (SLS 02B) |

Recommended Accessories

| | | |
|----------------|--------------------|--------------------------------------------------------------------------------|
| SLZ 01Y | - Supply No. 05012 | power supply 24 V DC for operating of max. 5 pcs. of showers |
| SLZ 01Z | - Supply No. 05011 | power supply 24 V DC for operating of max. 9 pcs. of showers |
| SLZ 04Y | - Supply No. 05042 | power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers |
| SLZ 04Z | - Supply No. 05041 | power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers |
| SLZ 04X | - Supply No. 10049 | power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers |
| SLZ 06 | - Supply No. 05060 | power supply 24 V DC for operating of max. 1 pc. of shower pcs. of showers |
| SLD 03 | - Supply No. 07030 | remote control for an adjustment of parameters |
| SLA 03 | - Supply No. 06030 | vandal-proof shower head with possibility to set an angle of water flow |
| SLA 13 | - Supply No. 06130 | vandal-proof shower head with possibility to set an angle of water flow |
| SLA 14 | - Supply No. 06140 | vandal-proof shower head |
| SLA 28 | - Supply No. 06280 | shower head |
| SLA 39 | - Supply No. 06390 | vandal-proof shower head |
| SLA 40 | - Supply No. 06400 | vandal-proof shower head with possibility to set an angle of water flow |
| SLA 36 | - Supply No. 06360 | set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B) |